



**Cub Cadet**  
**PRO SERIES**



**BUILT  
DIFFERENT**



**ASK YOUR DEALER ABOUT EXCEPTIONAL FINANCING OFFERS.\***

\*Restrictions apply. See dealer or [cubcadet.com/en\\_US/financing](http://cubcadet.com/en_US/financing) for details.



# PRO Z™ SERIES Your difference maker.

Maintenance-free spindles and EFI engine options designed for productivity, while a fully welded frame and commercial-grade deck were engineered to stand up to tough demands for years to come.



## What makes the Pro Z Series different?

CATEGORY-EXCLUSIVE STEERING SYSTEMS  
**EPS STEERING WHEEL & LAP BAR**

COMMERCIAL-GRADE STRENGTH  
**7-GAUGE STEEL DECK**

EASY AND QUICK DECK ADJUSTMENTS  
**ELECTRO-HYDRAULIC LIFT SYSTEM**

HILLSIDE STABILITY  
**REAR DUAL-WHEEL TRACTION**  
(AVAILABLE ONLY ON THE PRO Z 972 SD AND SDL)

PRISTINE PASSES  
**MARBAIN® BLADES**

WARRANTY: 3-year limited, no-hour-limit warranty\* / 5-year limited, 1,750-hour limited deck warranty\*



### PRO Z 500

HORSEPOWER / ENGINE DISPLACEMENT:  
Up to 27 hp† / 852cc

DECK SIZES:  
54" and 60"

REAR TIRES:  
24" x 12" – 12"



### PRO Z 700

HORSEPOWER / ENGINE DISPLACEMENT:  
Up to 31 hp† / 999cc

DECK SIZES:  
60"

REAR TIRES:  
24" x 12" – 12"



### PRO Z 900

HORSEPOWER / ENGINE DISPLACEMENT:  
Up to 38.5 hp† / 999cc

DECK SIZES:  
60" and 72"

REAR TIRES:  
26" x 12" – 12"



### PRO Z 972 SD/SDL

HORSEPOWER / ENGINE DISPLACEMENT:  
Up to 35 hp† (SD) and up to 38.5 hp† (SDL) / 999cc

SEAT SWIVEL:  
Self-leveling air-ride seat (SDL)

REAR TIRES:  
Dual Terra Trac tread 25" x 9" – 12"

# PRO Z PERFORMANCE Built to meet high standards.

## PRO Z 500 SERIES - LAP BAR OR STEERING WHEEL CONTROL

|                |  |   |
|----------------|--|---|
| PRO Z 554 L KW | 27 HP <sup>†</sup> 852cc, Kawasaki® FX850v | 54" triple 7-gauge fabricated deck, maintenance-free spindles, 12cc Parker® HTJ transmissions, adjustable ROPS, lap bars              |
| PRO Z 560 L KW | 27 HP <sup>†</sup> 852cc, Kawasaki FX850v  | 60" triple 7-gauge fabricated deck, maintenance-free spindles, 12cc Parker HTJ transmissions, adjustable ROPS, lap bars               |
| PRO Z 554 S KW | 27 HP <sup>†</sup> 852cc, Kawasaki FX850v  | 54" triple 7-gauge fabricated deck, maintenance-free spindles, 12cc Parker HTJ transmissions, adjustable ROPS, steering wheel control |
| PRO Z 560 S KW | 27 HP <sup>†</sup> 852cc, Kawasaki FX850v  | 60" triple 7-gauge fabricated deck, maintenance-free spindles, 12cc Parker HTJ transmissions, adjustable ROPS, steering wheel control |

## PRO Z 700 SERIES - LAP BAR OR STEERING WHEEL CONTROL

|                |   |   |
|----------------|---|---|
| PRO Z 760 L KW | 31 HP <sup>†</sup> 999cc, Kawasaki FX921v | 60" triple-7-gauge fabricated deck, maintenance-free spindles, 14cc Parker HTG transmissions, adjustable ROPS, lap bars               |
| PRO Z 760 S KW | 31 HP <sup>†</sup> 999cc, Kawasaki FX921v | 60" triple-7-gauge fabricated deck, maintenance-free spindles, 14cc Parker HTG transmissions, adjustable ROPS, steering wheel control |

## PRO Z 900 SERIES - LAP BAR OR STEERING WHEEL CONTROL

|                   |  |  |
|-------------------|--|--|
| PRO Z 960 L KW    | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v       | 60" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, lap bars                              |
| PRO Z 960 L EFI   | 38.5 HP <sup>†</sup> 999cc, Kawasaki FX1000v-EFI | 60" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, lap bars                              |
| PRO Z 972 L KW    | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v       | 72" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, lap bars                              |
| PRO Z 972 L EFI   | 38.5 HP <sup>†</sup> 999cc, Kawasaki FX1000v-EFI | 72" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, lap bars                              |
| PRO Z 960 S KW    | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v       | 60" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, steering wheel control                |
| PRO Z 972 S KW    | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v       | 72" triple-7-gauge fabricated deck, maintenance-free spindles, 16cc Parker HTG transmissions, adjustable ROPS, steering wheel control                |
| PRO Z 972 SD      | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v       | 72" fabricated deck w/ power deck lift, rear dual wheels, dual 16cc Parker HTG transmissions, adjustable ROPS, steering wheel control                |
| PRO Z 972 SDL EFI | 38.5 HP <sup>†</sup> 999cc, Kawasaki FX1000v-EFI | 72" fabricated deck w/ power deck lift, self-leveling seat, rear dual wheels, 16cc Parker HTG transmissions, adjustable ROPS, steering wheel control |

## PRO Z SUREPATH® A whole different kind of machine.

Cub Cadet's first GPS-operated and semi-autonomous mower designed to minimize overlap and designed to hold straight lines while also making turns with the push of a button. This can save you and your crew valuable time and effort. SurePath technology only available with Cub Cadet®



CUB CADET'S FIRST  
GPS-OPERATED

HELPS MINIMIZE EFFORT  
SEMI-AUTONOMOUS STEERING

HELPS PREVENT TURFING  
AUTO TURNS

ADVANCED TECHNOLOGY  
SIMPLE THREE-STEP OPERATION

PRISTINE STRIPING  
AUTO STEER CONSISTENCY

|                         |  |  |
|-------------------------|--|--|
| PRO Z 960 S<br>SurePath | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v | 60" fabricated deck, steering wheel w/ auto steering, 16cc Parker HTG, adjustable ROPS |
| PRO Z 972 S<br>SurePath | 35 HP <sup>†</sup> 999cc, Kawasaki FX1000v | 72" fabricated deck, steering wheel w/ auto steering, 16cc Parker HTG, adjustable ROPS |

## ASK YOUR DEALER ABOUT ATTACHMENTS AND ACCESSORIES (EACH SOLD SEPARATELY)



Ultra-Traction  
Tire / Rim



12-Volt  
Outlet Kit



Striping Kit



Light Kit



PCS 1900 Power  
Collection System



Clam Shell  
Bagger



Bagger Weight Kit



Grass Collector

# PRO X™ SERIES

## Different done better.

The PRO X Series takes stand-on productivity to the next level with zero-turn maneuverability, easy-to-adjust suspension and a fully fabricated deck — helping your operation go further.



|   |   |
|---|---|
| COMPACT FOOTPRINT<br><b>OCCUPIES LITTLE TRAILER SPACE</b> | EXCELLENT GROUND CLEARANCE<br><b>24-INCH TIRES</b> (ON SELECT MODELS) |
| OPTIMAL PERFORMANCE<br><b>INTUITIVE MANEUVERABILITY</b>   |   |
| IMPACT ABSORPTION<br><b>ADJUSTABLE SUSPENSION</b>         | STRENGTH WITHOUT COMPROMISE<br><b>ULTRA-COMFORTABLE RIDE</b>          |

WARRANTY: PRO X 636 — 2-year limited, no-hour-limit manufacturer's warranty\*

PRO X 648, 654, 660 — 3-year limited, no-hour-limit manufacturer's warranty plus 5-year limited, 1,750-hour limited deck manufacturer's warranty\*

|               |                                    |   |
|---------------|------------------------------------|---|
| PRO X 636     | 18.5 HP†, 603cc Kawasaki® FS600v   | 36" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear® pumps / 14.5 cu. in. Parker® wheel motors |
| PRO X 648     | 22 HP†, 726cc Kawasaki FX691v      | 48" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear pumps / 14.5 cu. in. Parker wheel motors   |
| PRO X 654     | 25.5 HP†, 852cc Kawasaki FX801v    | 54" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear pumps / 14.5 cu. in. Parker wheel motors   |
| PRO X 654 EFI | 29.5 HP†, 852cc Kawasaki FX850 EFI | 54" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear pumps / 14.5 cu. in. Parker wheel motors   |
| PRO X 660     | 25.5 HP†, 852cc Kawasaki FX801v    | 60" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear pumps / 14.5 cu. in. Parker wheel motors   |
| PRO X 660 EFI | 29.5 HP†, 852cc Kawasaki FX850 EFI | 60" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear pumps / 14.5 cu. in. Parker wheel motors   |

# PRO HW™ SERIES

## Cut with more confidence.

The durable PRO HW Series is tough enough to handle long days and demanding jobs while the innovative steering allows you to command every pass with precision and minimal effort. The result? A pristine efficient cut, season after season.



|  |  |
|--|--|
| STRENGTH<br><b>FULLY FABRICATED DECK</b>             | SPEED CONTROL<br><b>HYDRO DRIVE SYSTEM</b> |
| EASY STEERING<br><b>MULTI- OR EASY-TRAC STEERING</b> |  |
| PERFORMANCE<br><b>HIGH-LIFT MARBAIN® BLADES</b>      | STRENGTH<br><b>10-GAUGE STEEL DECK</b>     |

WARRANTY: 2-year limited, no-hour limit warranty\*

|            |                                 |  |
|------------|---------------------------------|--|
| PRO HW 336 | 14.5 HP†, 603cc Kawasaki FS481v | 36" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear ZT 2800 charged commercial-grade transmission |
| PRO HW 348 | 15 HP†, 603cc Kawasaki FS541v   | 48" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear ZT 2800 charged commercial-grade transmission |
| PRO HW 354 | 18.5 HP†, 603cc Kawasaki FS600v | 54" 10-gauge fabricated deck, maintenance-free spindles, 12cc Hydro-Gear ZT 2800 charged commercial-grade transmission |

\* For full warranty details and exclusions, visit [www.cubcadet.com](http://www.cubcadet.com) or your local dealer.

† As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

Cub Cadet commercial products are intended for professional use.

Models subject to limited availability. Images may not reflect dealer inventory and/or unit specifications. Specifications subject to change without notice

Kawasaki® is a registered trademark of KAWASAKI JUKOGYO KABUSHIKI KAISHA.

Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership.

Marbain® is a registered trademark of Fisher-Barton, Inc.

Parker® is a registered trademark of Parker Intangibles LLC.

© 2023 Cub Cadet | Printed in U.S.A. 773-10381





## OUTDOOR POWER EQUIPMENT



### 60V MAX\* 15"-17" STRING TRIMMER

#### DCST972X1

- FLEXVOLT™ 9Ah battery (in 20V MAX\* mode)
- Gear drive design powers through tough overgrowth
- 15"-17" adjustable cutting swath with DEWALT 0.080" or 0.095" line
- Attachment capable

Includes: DCST972X1 String Trimmer, 60V 3.0Ah Battery, Charger, Auxiliary Handle and Guard and 0.080" Line Prewound in Spool.

NEW



### 60V MAX\* EDGER

#### DCED472X1

- 60V - 3Ah - 7.5" Edger
- Easily adjustable height for adjustability in application and accessory wear
- High-efficiency brushless motor for longer motor life and 42 minutes of run time.

Includes: DCED472X1 Edger, 60V 3.0Ah Battery and Charger.

NEW



### 60V MAX\* 20" CHAINSAW

#### DCCS677Z1

- 20" low kick-back bar and chain for outdoor and construction applications
- High efficiency brushless motor for fast and powerful cuts for tackling heavy-duty jobs
- Tooled chain tensioning for reliable bar retention

Includes: DCCS677Z1 Chainsaw, Rugged Carrying Case, 60V 5.0Ah Battery, Charger and Hard Bar Cover.



### 60V MAX\* HEDGE TRIMMER

#### DCHT870T1

- 26" hardened steel, laser-cut dual-action blade for fast cutting with 3400 strokes per minute
- High-efficiency brushless motor for longer motor life and run time
- 1 1/4" blade gap with dual shear edges for superior cutting performance on thick branches
- Wrap around aux handle comfortable in multiple orientations

Includes: DCHT870T1 Hedge Trimmer, 60V 2.0Ah Battery and Charger.



### 60V MAX\* 16" CHAINSAW

#### DCCS670X1

- FLEXVOLT™ 9Ah battery (in 20V MAX\* mode)
- 16" bar and chain for outdoor and construction applications
- High efficiency brushless motor delivers up to (70) 6x6" cuts per charge (3.0Ah)

Includes: DCCS670X1 Chainsaw, 60V 3.0Ah Battery, Charger and Hard Bar Cover.



### 60V MAX\* 20" CHAINSAW WITH CASE

#### DCCS677Y1

- 20" low kick-back bar and chain for outdoor and construction applications
- High efficiency brushless motor for fast and powerful cuts for tackling heavy-duty jobs
- Tooled chain tensioning for reliable bar retention
- 4.4 horsepower

Includes: DCCS677Y1 Chainsaw, Rugged Carrying Case, 60V 4.0Ah Battery, Charger and Hard Bar Cover.



### 60V MAX\* HANDHELD BLOWER

#### DCBL772X1

- Powers through debris at up to 600 CFM of air volume at 125 MPH
- High-efficiency brushless motor maximizes run time and motor life
- Variable speed trigger with speed lock
- Designed to withstand everyday heavy-duty usage

Includes: DCBL772X1 Blower, 60V 3.0Ah Battery and Charger.



### 60V MAX\* 18" CHAINSAW

#### DCCS672X1

- 18" bar and chain for outdoor and construction applications
- High efficiency brushless motor cuts through a 16" log in 25 seconds
- Tooled chain tensioning for reliable bar retention
- 2.8 horsepower

Includes: DCCS672X1 Chainsaw, 60V 3.0Ah Battery, Charger and Hard Bar Cover.

**GUARANTEED TOUGH.®**

[www.DEWALT.com](http://www.DEWALT.com)

\*Maximum initial battery voltage (measured without a workload) is 60 volts. Nominal voltage is 54. DEWALT® and GUARANTEED TOUGH® are registered trademarks of the DEWALT Industrial Tool Co. All rights reserved. The yellow and black color scheme is a trademark for DEWALT Power Tools and Accessories. © 2023 DEWALT. 773-10383



## OUTDOOR POWER EQUIPMENT



### ELECTRIC CHAINSAW

**DWCS600**

- Low kick back 18" bar and chain
- Metal bucking spikes for superior leverage for easier and more controlled cuts
- 12.5 m/s and 15 amps for fast and powerful cuts for tackling heavy-duty jobs
- Automatic oiling for fast cuts and smooth operation

Includes: DWCS600 Chainsaw.



### ELECTRIC PRESSURE WASHER

**DWPW2100**

- 2100 PSI 1.2 GPM Powerful 13 amp motor providing the performance for the jobsite as well as residential
- Vertical or horizontal unit storage with multiple grab points
- Hose, wand, soap and nozzle storage built in

Includes: DWPW2100 Pressure Washer, Turbo Nozzle, 15-Degree Nozzle, 40-Degree Nozzle, Soap Nozzle, Wand and Hose.



### MANUAL 2-GALLON SPRAYER

**190612**

- 21" stainless steel wand with poly lining for extra chemical resistance
- Multiple nozzles included for many applications
- Sealed Pressure Relief Valve for releasing built up pressure prior to opening tank

Includes: 190612 2-Gallon Sprayer.



### MANUAL 4-GALLON SPRAYER

**190652**

- 21" stainless steel wand with poly lining for extra chemical resistance
- Padded back harness for all day comfort
- Non-leaking internal pumping

Includes: 190652 4-Gallon Sprayer.



### ELECTRIC PRESSURE WASHER

**DWPW2400**

- Power through a variety of cleaning tasks with a 2400 max PSI and 1.1 GPM
- Clean with detergent by using integrated soap tank
- Withstand heavy-duty usage with 25' kink-resistant hose

Includes: DWPW2400 Pressure Washer, Turbo Nozzle, 15-Degree Nozzle, 25-Degree Nozzle, 40-Degree Nozzle, Soap Nozzle, Wand and Hose.



*Cub Cadet®*

**YOUR BEST  
YARD AWAITS.**

LAWN & GARDEN TRACTORS





A French Bulldog with brown and white fur is running across a lush green lawn towards a bright orange ball. The background is a soft-focus green hedge.

# A LAWN OF POSSIBILITIES.

When you look at your yard, you see what it could be. And the XT™ Enduro Series® is engineered to deliver the performance you need. Our lawn tractors have been designed to give you a great experience right from the start, with the comfort and command you've come to expect from Cub Cadet®. With precise cutting performance, responsive handling, year-round versatility and strong warranties, the XT™ Enduro Series® is the perfect machine for the job at hand. Because we know the reason you put so much into your lawn is to get the most out of it.

Visit [cubcadet.com](http://cubcadet.com) to learn more.



# TABLE OF CONTENTS

|                           |    |
|---------------------------|----|
| XT™ ENDURO SERIES®        | 4  |
| XT1® TRACTORS             | 6  |
| XT2® TRACTORS             | 8  |
| CC30 RIDERS               | 10 |
| ATTACHMENTS & ACCESSORIES | 12 |
| SELECTION GUIDE           | 14 |

# STRENGTH BUILT INTO EVERY DETAIL.

From the moment you buy to the moment you mow, Cub Cadet® is committed to providing an excellent experience that comes with the XT™ Enduro Series®. Take a look at all of the XT Enduro advantages tailored to help unlock all the possibilities of your lawn.





**XT1**  
ENDURO SERIES



**XT1**  
ENDURO SERIES



**XT2**  
ENDURO SERIES



## XT™ ENDURO SERIES® ADVANTAGES

### ▶ **AeroForce™ Fabricated Decks Designed to Deliver a Precise Cut**

A heavy-duty fabricated AeroForce™ deck engineered for optimal airflow and suction that helps prevent clumping during discharge and provides excellent bagging performance (available on XT1® and XT2® gas powered).

### ▶ **Responsive Handling**

Automotive-inspired handling with an optimized steering system delivers a 16-inch turning radius on the XT1® and XT2®.

### ▶ **Comfort Comes Standard**

Adjustable high-back seat with 10-degree incline and slide slope, for operator comfort.

### ▶ **Smooth and Simple Operation**

Hydrostatic transmission—no shifting, just push the pedal and go.

### ▶ **Excellent Support**

An experienced national dealer network and dedicated personal owner support seven days a week.

### ▶ **Strong Warranty†**

- 3-year/no hour limit, limited product warranty, including powertrain
- 5-year/no hour limit chassis and front axle, limited warranty
- Limited lifetime fabricated deck shell.
- 4-year limited battery warranty and 5-year/no hour limit chassis and front axle, limited product warranty on XT1® Electric.

### ▶ **Year-Round Attachments**

Bagging, mulching and snow plowing attachments designed to maximize the versatility of your Cub Cadet® lawn tractor.

† Limited warranty - normal wear parts 30 days. Certain restrictions apply. For full warranty details, visit cubcadet.com or see your local dealer.

# A CUT ABOVE.

Engineered for strength, comfort and versatility—the XT1® Enduro Series®. Fully loaded and equipped for mowing, hauling and more with a variety of attachments designed for your needs (each sold separately).

# XT1<sup>®</sup>

## ENDURO SERIES<sup>®</sup>

- Gas
- Electric

### XT1<sup>®</sup> GAS

- **Strong Options**  
Choose between heavy-duty AeroForce™ fabricated or stamped decks.
- **Excellent Comfort**  
Cut-and-sew, adjustable 15-inch high-back seat with 10-degree sliding incline.
- **Powerful Performance**  
A lineup of engine options that power the responsive, automotive-inspired handling and Turf Saver® traction.
- **Strong Warranties<sup>†</sup>**
  - 3-year/no hour limit, limited product warranty, including powertrain
  - 5-year/no hour limit, limited warranty on chassis and front axle
  - Limited lifetime fabricated deck shell

### XT1<sup>®</sup> ELECTRIC

- **Powerful Deck**  
Direct-drive 42-inch stamped deck powered by one brushless motor per blade, engineered for optimal airflow and efficiency. And with side discharge, bagging and mulching capabilities, designed for a consistent and premium cut.
- **Cuts Grass Like Gas**  
Think electric equipment compromises power? Think again. Our lithium-ion-powered electric lineup delivers a quality cut that you would expect from any Cub Cadet®.
- **Less Maintenance Than Gas**  
No gas, oil changes, spark plugs, belts or pulleys to change or repair.
- **Strong Warranties<sup>†</sup>**
  - 3-year limited product / 4-year limited battery warranty
  - 5-year/no hour limit, limited warranty on chassis and front axle



<sup>†</sup>Limited warranty - normal wear parts 30 days. Certain restrictions apply. For full warranty details, visit cubcadet.com or see your local dealer.





CUSTOMER RATING ★★★★★

"Great Purchase! Awesome power and cutting ability! Love the purchase!"

Customer from Florida | **XT1® LT46**



# PREMIUM AND POWERFUL.

The XT2® Enduro Series® is designed for higher levels of power, control and durability than the XT1® lineup. Dealer-exclusive XT2® tractors are ideal for more challenging terrain, hauling and all-season attachment use.

## The XT2® Difference When Compared to XT1®

Every inch of the XT2® has been designed to enhance your mowing experience, including features such as:

### ▶ Excellent Comfort

Soft-Touch steering wheel plus a cut-and-sew, adjustable 15-inch high-back seat with 10-degree sliding incline and armrests.

### ▶ Powerful Engine

Full lineup of 20 to 25 hp\* Kohler® HD engines along with hydrostatic transmission.

### ▶ Improved Traction

Multi-Trac wheels designed to minimize slippage. Available on select models.

### ▶ Durability

Front wheel bearings for friction-free tire and wheel rotation, as well as bumper and brush guard (on select models).

### ▶ Precise Cut

A lineup of heavy-duty fabricated AeroForce™ decks engineered for optimal airflow and suction that helps prevent clumping during discharge and provides excellent bagging performance.

### ▶ FastAttach® Blade System

A sharper blade is better, but it doesn't have to be a hassle. Our patented FastAttach® blade system requires no tools, and blades can be changed quickly. Available on select models.

### ▶ Strong Warranties†

- 3-year/no hour limit, limited product warranty, including powertrain
- 5-year/no hour limit, limited product warranty on chassis and front axle
- Limited lifetime fabricated deck shell

# XT2®

## ENDURO SERIES®



▶ Gas



\*As rated by Kohler®, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.

†Limited warranty - normal wear parts 30 days. Certain restrictions apply. For full warranty details, visit cubcadet.com or see your local dealer.





**CUSTOMER RATING** ★★★★★

"Excellent product. Great machine, easy to ride and maneuver around our 3.5 acre yard."

Customer from Kentucky | **XT2® LX46**





# COMPACT YET POWERFUL.

Designed to deliver, the CC30's compact frame helps provide easy maneuverability and control so you can make quick work of even those hard-to-reach areas.

## CC30 GAS

- ▶ **Powerful Deck**  
30-inch single-blade stamped deck designed to provide even cuts when mowing.
- ▶ **Hydrostatic Transmission**  
Smooth operation with no shifting as well as forward and reverse pedal.
- ▶ **Comfort-Packed**  
An easy access step-through design with high-back seat and cruise control for comfortable operation.
- ▶ **Strong Product Warranty<sup>†</sup>**  
3-year limited residential warranty.

## CC30 ELECTRIC

- ▶ **Powerful Deck**  
Direct-drive 30-inch stamped deck powered by one brushless motor allows for optimal airflow and efficiency. Side-discharge, bagging and mulching capabilities designed to deliver a consistent and precise cut.
- ▶ **Cut Grass Like Gas**  
Think electric equipment compromises power? Think again. Our lithium-ion-powered electric lineup delivers a quality cut that you would expect from any Cub Cadet®.
- ▶ **Less Maintenance Than Gas**  
No gas, oil changes, spark plugs, belts or pulleys to change or repair.
- ▶ **Strong Warranty<sup>†</sup>**  
3-year limited product / 4-year limited battery warranty.

<sup>†</sup>Limited warranty - normal wear parts 30 days. Certain restrictions apply. For full warranty details, visit [cubcadet.com](http://cubcadet.com) or see your local dealer.

# CC30

- ▶ Gas
- ▶ Electric



CUSTOMER RATING ★★★★★

"Compact, Smooth. Quiet. I've only had the unit a short time, but I love it, it handles very well, quiet, compact fits in garage well"

**CC30E**





# YEAR-ROUND VERSATILITY.

Designed to get more done season after season with a selection of attachments and accessories designed for a variety of jobs. Here are a few popular choices.



## Leaf Collection System

Built to fit XT1® and XT2® tractors as well as most standard tow-behind carts, the high-lift blades in this leaf collection system enable quick and easy pick-up of leaves in your yard.



## Bagger System

Designed for excellent bagging performance with twin baggers available to fit every rider. And for even bigger jobs, triple baggers are available on riders 42 inches and larger.



## Snow Cab

Built with a powder-coated steel frame, this spacious snow cab is designed for 360-degree visibility.



## Sun Shade

Mow in comfort with a spacious sun shade.



## GENUINE PARTS. GENUINE ADVANTAGE.

Cub Cadet® Genuine Parts are the only parts designed and engineered to meet Cub Cadet® original equipment standards.

## ATTACHMENTS & ACCESSORIES

(Each sold separately)



## FastAttach® All-Season Plow

With the convenience of the FastAttach® Connection System, this 46-inch strong all-season plow is designed to move snow, dirt, gravel, mulch and more.



## 3X® 42-Inch Three-Stage Snow Blower Attachment

Innovative three-stage technology clears deep snowfall faster than a Cub Cadet® 2X® two-stage snow blower.



## Mulch Kit

This kit cuts grass into fine pieces that can be returned to your lawn to help keep it healthy.



## CUB CADET® 2-YEAR EXTENDED WARRANTY\*

After the manufacturer's warranty expires, the Cub Cadet® Extended Warranty adds another 2 years of coverage. Should your product need repair, this plan will help keep you covered so that you can spend your time enjoying your yard, not worrying about it.

\*Available on eligible residential products. See dealer for complete details. Certain restrictions apply.





SELECTION  
GUIDE

| SELECTION GUIDE          | CC30H  | LT42B  | LT46                             | LT50  | ST54                | GT54  |
|--------------------------|--|--|----------------------------------|---|---------------------|---|
| ENGINE                   |  |  |                                  |   |                     |   |
| Engine Type              | 10.5 hp* Briggs & Stratton® single OHV             | 19 hp* Briggs & Stratton® single OHV   | 23 hp** Kohler® 7000 Series twin | 24 hp** Kohler® 7000 Series V-twin OHV  |                     | 25 hp** Kohler® 7000 Series V-twin OHV                    |
| Engine Start Method      | Electric / key                                     | Electric / key   |                                  |   |                     |   |
| Fuel Tank Capacity       | 1.3 gal  | 3 gal  |                                  |   |                     |   |
| CUTTING DECK             |  |  |                                  |   |                     |   |
| Deck Construction        | 14-gauge stamped deck                              | 13-gauge stamped deck  | 12-gauge stamped deck            | 11-gauge AeroForce™ fabricated deck   |                     |   |
| Cutting Width / Blades   | 30" / single blade                                 | 42" / twin blade   | 46" / twin blade                 | 50" / triple blade  | 54" / triple blade  | 54" / triple blade  |
| Deck Cutting Height      | 1" – 3.5"  | 1" – 4"  |                                  |   |                     |   |
| Anti-Scalping Wheels     | –  | 2 ball   | 2 ball / 2 narrow                | 2 ball / 2 ball / 1 nose roller   |                     |   |
| Deck Blade Engagement    | Lever  | Lever  |                                  | Electric  |                     |   |
| Deck Lift                | Lever / 5 positions / spring-assisted              | Lever / 12 positions / spring-assisted   |                                  |   |                     |   |
| Deck Wash                | SmartJet™ high-pressure deck washing system        | SmartJet high-pressure deck washing system   |                                  |   |                     |   |
| Spindle Construction     | Sealed ball bearing spindles / maintenance-free    | Sealed ball bearing spindles / maintenance-free  |                                  |   |                     |   |
| DRIVE SYSTEM             |  |  |                                  |   |                     |   |
| Transmission             | Hydro-Gear® T2HP                                   | Tuff Torq® foot-controlled hydrostatic transmission (TL-200)   |                                  | Tuff Torq® foot-controlled hydrostatic transmission (K46)   |                     | Tuff Torq® foot-controlled hydrostatic transmission (K58) |
| Forward / Reverse Speeds | Up to 4 mph / 2 mph                                | Up to 5.5 mph / 3 mph  |                                  |   |                     |   |
| Rear Differential Lock   | –  | –  |                                  |   |                     |   |
| CHASSIS                  |  |  |                                  |   |                     |   |
| Frame                    | 14-gauge welded steel                              | Robotically welded frame   |                                  |   |                     |   |
| Front Axle               | Steel  | Heavy-duty cast iron   |                                  |   |                     |   |
| Turning Radius           | 18"  | 16"  |                                  |   |                     |   |
| Front Tires              | 13" x 5" (sleeve)                                  | 15" x 6" (sleeve)  |                                  |   | 16" x 6.5" (sleeve) |   |
| Rear Tires               | 16" x 6.5"   | 20" x 8"   |                                  |   | 22" x 9.5"          |   |
| Tire Tread               | Turf Saver®  | Turf Saver®  |                                  |   |                     |   |
| Protection               | Front bumper                                       | –  |                                  |   | Front bumper        |   |
| CONTROLS                 |  |  |                                  |   |                     |   |
| Steering Control         | Designed for optimized steering, sector and pinion | Designed for optimized steering / sector and pinion  |                                  |   |                     |   |
| Brakes                   | Disc   | Disc   |                                  |   |                     |   |
| Cruise Control           | –  | Standard   |                                  |   |                     |   |
| COMFORT                  |  |  |                                  |   |                     |   |
| Seat                     | 15" Cub Comfort™ deluxe high-back seat             | 15" Cub Comfort™ high-back seat / 10" slide adjust   |                                  |   |                     |   |
| WARRANTY¹                |  |  |                                  |   |                     |   |
| Warranty¹                | 3-year limited residential                         | 3-year product limited/unlimited hours (includes powertrain) / 5-year limited chassis and front axle unlimited hours |                                  | 3-year product limited/unlimited hours (includes powertrain) / 5-year chassis and front axle unlimited hours / limited lifetime fabricated deck shell |                     |   |

\* Gross hp per SAE J1940 as rated by engine manufacturer at 3600 RPM.

\*\* As rated by Kohler®, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.


\*\*\* Maximum initial battery voltage (measured without a workload) is 56 volts. Nominal voltage is 50.4 volts.

† Limited warranty - normal wear parts 30 days. Certain restrictions apply. For full warranty details, visit cubcadet.com or see your local dealer.

**SELECTION GUIDE**

| SELECTION GUIDE          | LX42  | LX46                                | SLX50                               | SLX54                          | GX50  | GX54D   | CC30E                    | XT1® LT42E  |   |
|--------------------------|---|-------------------------------------|-------------------------------------|--------------------------------|---|---|--------------------------|---|---|
| ENGINE                   |   |                                     |                                     |                                |   |   | POWER                    |   |   |
| Engine Type              | 20 hp** Kohler® 7000 Series HD twin   | 23 hp** Kohler® 7000 Series HD twin | 24 hp** Kohler® 7000 Series HD twin |                                | 25 hp** Kohler® 7000 Series HD twin                       |   | Power Source             | Lithium-ion Battery                                 |   |
| Engine Start Method      | Electric / key  |                                     |                                     |                                |   |   | Battery                  | 56V MAX***-1500Wh-30Ah                              | 56V MAX***-3000Wh-60Ah  |
| Fuel Tank Capacity       | 3 gal   |                                     |                                     |                                |   |   | Charger                  | 110V fast charger                                   |   |
| CUTTING DECK             |   |                                     |                                     |                                |   |   | CUTTING DECK             |   |   |
| Deck Construction        | 11-gauge AeroForce™ fabricated deck   |                                     |                                     |                                |   |   | Deck Construction        | 14-gauge stamped deck                               | 13-gauge stamped deck   |
| Cutting Width / Blades   | 42" / twin blade  | 46" / twin blade                    | 50" / FastAttach® triple blade      | 54" / FastAttach® triple blade | 50" / FastAttach® triple blade                            | 54" / FastAttach® triple blade                            | Cutting Width / Blades   | 30" / single blade                                  | 42" / twin blade  |
| Deck Cutting Height      | 1" – 4"   |                                     |                                     |                                |   |   | Deck Cutting Height      | 1" – 3.5"   | 1" – 4"   |
| Anti-Scalping Wheels     | 2 ball  | 2 ball / 2 ball                     | 2 ball / 2 ball / nose roller       |                                |   |   | Anti-Scalping Wheels     | –   | 2 ball  |
| Deck Blade Engagement    | Lever   | Electric                            |                                     |                                |   |   | Deck Blade Engagement    | Electric  |   |
| Deck Lift                | Lever / 12 positions / spring-assisted  |                                     |                                     |                                |   |   | Deck Lift                | Lever / 5 positions / spring-assisted               | Lever / 12 positions / spring-assisted  |
| Deck Wash                | SmartJet™ high-pressure deck washing system   |                                     |                                     |                                |   |   | Deck Wash                | –   |   |
| Spindle Construction     | Sealed ball bearing spindles / maintenance-free   |                                     |                                     |                                |   |   | Spindle Construction     | Brushless Motors                                    |   |
| DRIVE SYSTEM             |   |                                     |                                     |                                |   |   | DRIVE SYSTEM             |   |   |
| Transmission             | Tuff Torq® foot-controlled hydrostatic transmission (K46)   |                                     |                                     |                                | Tuff Torq® foot-controlled hydrostatic transmission (K58) | Tuff Torq® foot-controlled hydrostatic transmission (K62) | Transmission             | Foot-controlled electric drive                      |   |
| Forward / Reverse Speeds | Up to 5.5 mph / 3 mph   |                                     |                                     |                                |   |   | Forward / Reverse Speeds | Up to 4 mph / 2 mph                                 | Up to 5.5 mph / 3 mph   |
| Rear Differential Lock   | –   |                                     |                                     |                                |   | Pedal engaged   | Rear Differential Lock   | –   |   |
| CHASSIS                  |   |                                     |                                     |                                |   |   | CHASSIS                  |   |   |
| Frame                    | Robotically welded frame  |                                     |                                     |                                |   |   | Frame                    | 14-gauge welded steel                               | Robotically welded frame  |
| Front Axle               | Heavy-duty cast iron  |                                     |                                     |                                |   |   | Front Axle               | Steel   | Heavy-duty cast iron  |
| Turning Radius           | 16"   |                                     |                                     |                                |   |   | Turning Radius           | 18"   | 16"   |
| Front Tires              | 15" x 6" (ball bearing)   |                                     | 16" x 6.5" (ball bearing)           |                                |   |   | Front Tires              | 13" x 5"  | 15" x 6"  |
| Rear Tires               | 20" x 8"  |                                     | 22" x 9.5"                          |                                |   |   | Rear Tires               | 16" x 6.5"  | 20" x 8"  |
| Tire Tread               | Multi-Trac  |                                     | Turf Master                         |                                |   |   | Tire Tread               | Turf Saver  |   |
| Protection               | Front bumper  |                                     | FastAttach® brush guard             |                                |   |   | Protection               | Front bumper  |   |
| CONTROLS                 |   |                                     |                                     |                                |   |   | CONTROLS                 |   |   |
| Steering Control         | Designed for optimized steering / sector and pinion   |                                     |                                     |                                |   |   | Steering Control         | Designed for optimized steering / sector and pinion |   |
| Brakes                   | Disc  |                                     |                                     |                                |   |   | Brakes                   | Disc  |   |
| Cruise Control           | Standard  |                                     |                                     |                                |   |   | Cruise Control           | Standard  |   |
| COMFORT                  |   |                                     |                                     |                                |   |   | COMFORT                  |   |   |
| Seat                     | 15" Cub Comfort™ deluxe high-back seat with armrests / 10" slide adjust   |                                     |                                     |                                |   |   | Seat                     | 15" Cub Comfort™ deluxe high-back seat              | 15" Cub Comfort™ deluxe high-back seat / 10" seat slide   |
| WARRANTY¹                |   |                                     |                                     |                                |   |   | WARRANTY¹                |   |   |
| Warranty¹                | 3-year unlimited hours (includes powertrain) / 5-year chassis and front axle unlimited hours / limited lifetime fabricated deck shell |                                     |                                     |                                |   |   | Warranty                 | 3-year limited residential / 4-year limited battery | 3-year limited residential / 5-year limited chassis and front axle unlimited hours / 4-year limited battery |

Kohler<sup>®</sup> is a registered trademark of Kohler Co.  
Tuff Torq<sup>®</sup> is a registered trademark of Kanzaki Kogyokoki Mfg. Co. Ltd.  
Hydro-Gear<sup>®</sup> is a registered trademark of Hydro-Gear Limited Partnership  
Briggs & Stratton<sup>®</sup> is a registered trademark of Briggs & Stratton, LLC.  
Turf Saver<sup>®</sup> is a registered trademark of The Carlstar Group LLC.

 Dealer Exclusive

INDEPENDENT DEALER

*Cub Cadet*

# YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

Cub Cadet dealers know their equipment. And they know how to take care of it and their customers. You'll get exceptional financing, great offers and the expertise you can only find from professionals who sell and service Cub Cadet equipment every day.

## SUPPORT AS STRONG AS OUR MACHINES

Dedicated personal owner support seven days a week.

Visit [cubcadet.com](https://cubcadet.com) or call toll-free 1-877-428-2349.



[facebook.com/cubcadet](https://facebook.com/cubcadet)



[@cubcadet\\_usa](https://twitter.com/cubcadet_usa)



[cubcadet\\_usa](https://instagram.com/cubcadet_usa)



EXCEPTIONAL  
FINANCING  
OFFERS\*

\*Restrictions apply. See dealer or [cubcadet.com/en\\_US/financing](https://cubcadet.com/en_US/financing) for details.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating the machine, read, understand and follow all instructions in the manual and on the machine. Specifications are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.





**ZERO-TURNS.  
ZERO COMPARISON.**









# TABLE OF CONTENTS

|                           |    |
|---------------------------|----|
| ULTIMA SERIES™            | 4  |
| ULTIMA ZT™                | 8  |
| ULTIMA ZTS™               | 10 |
| ULTIMA ZTX™               | 12 |
| ULTIMA ZTXS™              | 14 |
| ATTACHMENTS & ACCESSORIES | 16 |
| SPECIFICATIONS            | 18 |



# ULTIMA



# SERIES™



STEP UP TO A MOWING  
EXPERIENCE UNLIKE ANY OTHER:  
**THE ULTIMA SERIES.™**

**ULTIMA SERIES**

# THE ULTIMATE ALL-AROUND MOWING EXPERIENCE.



## Forged for Strength and Durability

- A:** Continuous tubular steel frame
- B:** Premium Kohler® and Kawasaki® engines

## All Around Comfort

- C:** Polymer seat suspension
- D:** Rubber floor mat and ample legroom on all units

- E:** Overmolded rubber hand grips or intuitive Soft-Touch steering wheel with adjustable steering column
- F:** Automotive-inspired, comfortable and adjustable high-back seat



## STEERING OPTIONS DESIGNED TO MEET YOUR NEEDS



### Lap Bars

Overmolded and adjustable rubber hand grips designed to generate less vibration.



### Steering Wheel

Professional-grade Synchro-Steer™ technology, exclusive to Cub Cadet, makes for a familiar user experience as well as engineered for precision, control and stability on hills up to 20 degrees.



## Cut Quality for the Precise Pass

- G:** Stamped and fully welded fabricated steel AeroForce™ deck options
- H:** 15 quarter-inch deck height adjustments

- I:** Offset front axle on all lap bar units designed for precise trimming
- J:** Turf Master® rear tires

## Maintain With Ease

- K:** Maintenance-free spindles
- L:** Hinged floor pan for maintenance needs
- M:** Strong warranty,\* including deck shell and frame

\* Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

# ZERO-TURN LEADER.

Step up to the strength, comfort and precise cut of the Ultima Series ZT. And the fully electric ZT1, powered by a lithium-ion battery, is engineered with the same uncompromising commitment to design, comfort and performance we demand from every product.

## ► Tough Build

A continuous 2- x 2-inch tubular steel frame with protective e-coat on its lower end engineered for corrosion resistance.

## ► Redefined Comfort

An automotive-inspired, adjustable 20- or 24-inch high-back seat, comfortable hand grips and a rubber floor mat let you comfortably cut at your maximum speed up to 7.5 mph.

## ► Excellent Cut

The ZT's heavy-duty fabricated AeroForce™ deck engineered for optimal airflow and suction that helps prevent clumping during discharge and provides excellent bagging performance. (Available on select models.) The ZT1 42E's direct-drive 42-inch stamped deck powered by one brushless motor per blade engineered for optimal airflow and efficiency while using side-discharge, bagging or mulching.

## ► Seamless Maintenance

The ZT's highly accessible hinged floor pan for easy deck access and maintenance-free spindles helps make routine maintenance quick and simple. And with the electric ZT1, there's no gas, oil changes, spark plugs, belts or pulleys to change or repair.

## ► Strong Warranties†

- Gas ZT: 3-year/no hour limit, limited product warranty plus limited lifetime warranty on frame and fabricated deck shell
- Electric ZT1: 3-year limited product / 4-year limited battery warranty plus limited lifetime warranty on frame

## THE ULTIMA SERIES™ ZT™

### GAS

- ZT1™
- ZT2™
- ZT3™

(See page 18 for more details)

### ELECTRIC

- ZT1™ electric

(See page 20 for more details)





**CUSTOMER RATING ★★★★★**

“Easy to maneuver, no gas, oil or fumes and low maintenance. Also, this mower is fast and can go up to 7 mph. It’s phenomenal for mowing large long areas of yard. Bright headlights illuminate the area well if dusk approaches before you’ve finished.”

Customer from Fort Worth | *ULTIMA SERIES ZT1 42E*





# STEER IT TO BELIEVE IT.

The Ultima ZTS brings Cub Cadet's innovative and proprietary Synchro-Steer™ technology to the proven Ultima Series platform. Engineered for precision and confident control on challenging hills—all backed by the strength, comfort and cut quality of a Cub Cadet® zero-turn.

## ■ Excellent Control

Step up your control from traditional lap bars with Synchro-Steer technology. The familiar steering wheel experience plus four-wheel control makes for precision, maneuverability and stability on a variety of terrains—including hills up to 20 degrees.

## ■ Tougher Than Tough

A continuous 2- x 2-inch square tubular steel frame designed for strength and corrosion defense with e-coat is built for durability for years to come.

## ■ Powerful Performance

Power through tasks with premium Kohler® (ZTS1) and Kohler PRO (ZTS2) engines.

## ■ First-Class Comfort

Enjoy easy steering and single-handed operation with Synchro-Steer technology and a Soft-Touch steering wheel with adjustable steering column for intuitive control. Plus, an automotive-inspired, adjustable, cut-and-sew 20-inch high-back seat (ZTS1) / 20-inch high-back seat with comfortable armrests (ZTS2). Then there are the polymer seat isolators designed for a smoother, quieter ride than traditional springs.

## ■ Strong Warranties†

3-year/no hour limit, limited product warranty plus limited lifetime warranty on frame and fabricated deck shell.

## THE ULTIMA SERIES™ ZTS™

### GAS



Synchro-Steer™ technology

- ZTS1™
- ZTS2™

(See page 19 for more details)



† Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

\* As required by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.

As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.



**CUSTOMER RATING ★★★★★**

"Perfect lawn mower! This lawn mower has made my lawn look better than ever! The grass is perfect every time I use it. The steering wheel is simple to use to maneuver the lawn mower around obstacles such as my kids swing set and trampoline."

**ULTIMA SERIES ZTS142**





# STEP UP TO ANY CHALLENGE.

The commercial-grade build of this zero-turn engineered for strength and durability so you can comfortably cut at maximum speed through challenging conditions.

## ► Strength on Deck

Built on a 1.5- x 3-inch tubular frame featuring a 10-gauge steel fabricated AeroForce Max™ deck with side, top and leading-edge reinforcements and bagging capabilities, you're equipped with the right amount of strength and rigidity for precise cut quality.

## ► Powerful Performance

The commercial-grade Kohler® and Kawasaki® engines\* provide max speeds up to 9 mph to get the job done quickly.

## ► Command With Comfort

Polymer seat isolators, isolated front caster suspension and a high-back seat in 20- or 24-inch options with padded armrests designed for a smooth and quiet ride up to 9 mph with minimal vibration.

## ► Versatility

With a full lineup of attachments and LED headlights as well as a standard rollover protection structure bar and rear tow hitch, you can build the ideal zero-turn to tackle your needs.

## ► Strong Warranties†

- 4-year 800 hours limited product warranty
- Limited lifetime frame and fabricated deck shell

## THE ULTIMA SERIES™ ZTX™

### GAS

- ZTX4™
- ZTX5™
- ZTX6™

(See page 19 for more details)



† Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

\* As required by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.

As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.



CUSTOMER RATING ★★★★★

"Game changer. Superior power and cut. Great on the hills, high blade tip speed, great hydros, this thing is built like a tank."

Customer from Maine | **ULTIMA SERIES ZTX4 48**





# STEP UP TO STEERING.

Introducing the Cub Cadet® Ultima ZTXS, the machine that brings proprietary Synchro-Steer™ technology to the proven Ultima Series platform. Engineered for precision and confident control on varying terrain and challenging hills—all backed by the strength, comfort and cut quality of a Cub Cadet zero-turn. The commercial-grade features of the Ultima ZTXS zero-turns are designed for fast turning and efficient maneuverability through challenging conditions

## ■ Excellent Control

Step up your control from traditional lap bars with Synchro-Steer technology. The familiar steering wheel combined with four-wheel control makes for precision, maneuverability and stability on a variety of terrains including hills up to 20 degrees.

## ■ Strength on Deck

Built on a 1.5- x 3-inch tubular frame featuring a 10-gauge steel fabricated AeroForce Max™ deck with side, top and leading-edge reinforcements and bagging capabilities, you're equipped with the right amount of strength and rigidity for precise cut quality.

## ■ Versatility

With a full lineup of attachments and LED headlights as well as a standard rollover protection structure bar and rear tow hitch, you can build the ideal zero-turn to tackle your needs.

## ■ Command With Comfort

Polymer seat isolators, isolated front caster suspension and a high-back seat in 20- or 24-inch options with padded armrests designed for a smooth and quiet ride up to 9 mph with minimal vibration.

## ■ Strong Warranties†

- 4-year 800 hours limited product warranty
- Limited lifetime frame and fabricated deck shell

## THE ULTIMA SERIES™ ZTXS™

NEW

### GAS



Synchro-Steer™ technology

- ZTXS4™
- ZTXS5™
- ZTXS6™

(See page 19 for more details)



† Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

\* As required by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer.

As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.





# THE RIGHT TOOLS DESIGNED FOR YOUR TASK.

Dial up the versatility of your zero-turn by adding hardworking attachments that help you tackle your landscape with confidence and ease, year after year.



## **Bagger System**

Engineered for breakthrough bagging performance with twin and triple bagger options available for every rider.



## **All-Season Plow**

Designed to fit the Ultima ZT and Ultima ZTX, this 52-inch, 12-gauge steel blade can move snow, dirt, gravel and mulch with a single handle that lets the operator adjust the angle of the blade from the seat.



## **Striping Kit**

This striping kit is designed for professional-grade stripes while delivering a precise cut.



## **GENUINE PARTS. GENUINE ADVANTAGE.**

Cub Cadet Genuine Parts are the only parts designed and engineered to meet Cub Cadet original equipment standards.

# **ATTACHMENTS & ACCESSORIES**

(each sold separately)



## **Cub Cadet® Hauler**

With four collapsible sides for large loads, side access for easy unloading and up to 10 cubic feet of cargo space, this hauler holds what you need while using minimal space.



## **Armrest Kit**

These adjustable armrests designed for comfort and support you need to make quick turns and get the job done.



## **Mulch Kit**

This kit cuts grass into fine pieces that can be returned to your lawn to help keep it healthy.



## **CUB CADET 2-YEAR EXTENDED WARRANTY<sup>††</sup>**

After the manufacturer's warranty expires, the Cub Cadet Extended Warranty adds another 2 years of coverage. Should your product need repair, this plan will help keep you covered so that you can spend your time enjoying your yard, not worrying about it.

<sup>††</sup> Available on eligible residential products. See dealer for complete details.





| ULTIMA                   | ZT1™ 42  |  | ZT1 42 FAB   |   | ZT1 46   | ZT1 50                                  | ZT1 54  | ZT1 54P |   | ZT2™ 50            |                                   | ZT2 54  | ZT2 60                            | ZT3™ 60 |  |
|--------------------------|--|--|--|---|--|---|---|---------|---|--------------------|-----------------------------------|---|-----------------------------------|---------|--|
| ENGINE                   |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Engine Type              | 22 hp* Kohler® KT 7000 Series V-twin OHV                         |  | 18 hp* Kawasaki® FR600V V-twin OHV   | 22 hp* Kohler KT 7000 Series V-twin OHV | 23 hp* Kawasaki FR691V V-twin OHV                      | 24 hp* Kohler KT 7000 Series V-twin OHV | 23 hp* Kawasaki FR691V V-twin OHV   |         | 23 hp* Kawasaki FR691V V-twin OHV   |                    | 24 hp* Kawasaki FR730V V-twin OHV |   | 24 hp* Kawasaki FS730V V-twin OHV |         |  |
| Fuel Tank Capacity       | 3.5 gal  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| DRIVE SYSTEM             |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Transmission             | Dual Hydro-Gear® EZT 2200  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Forward / Reverse Speeds | Up to 7 mph / 3.5 mph  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| CONTROLS                 |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Steering                 | Lap bar  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Mow in Reverse           | Standard   |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Parking Brake            | Integrated system in lap bar                                     |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| CUTTING DECK             |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Deck Construction        | 13-gauge stamped deck  |  | 11-gauge AeroForce™ fabricated deck  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Cutting Width / Blades   | 42" / twin blade   |  |  | 46" / twin blade                        | 50" / triple blade                                     | 54" / triple blade                      |   |         | 50" / triple blade  | 54" / triple blade | 60" / triple blade                | 60" / triple blade  |                                   |         |  |
| Deck Cutting Height      | 1" – 4.5"  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Anti-Scalping Wheels     | 2 front  |  |  |   | 2 front / 1 nose roller                                |   |   |         |   |                    |                                   |   |                                   |         |  |
| Deck Blade Engagement    | Electronic fingertip engagement                                  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Deck Lift                | Foot-operated / 15 positions / dial adjust                       |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Deck Wash                | SmartJet™ high-pressure deck washing system                      |  | —  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Spindle Construction     | Sealed ball bearing spindles / maintenance-free                  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| CHASSIS                  |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Frame                    | Square 2" x 2" tubular upper and lower frame structure           |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Front Caster Mounts      | Rectangular 2" x 2.5" square frame / offset                      |  |  |   |  |   | Rectangular 2" x 2.5" tubular frame / offset / front caster suspension          |         | Rectangular 2" x 2.5" square frame / offset                                     |                    |                                   | Rectangular 2" x 2.5" tubular frame / offset / front caster suspension          |                                   |         |  |
| ROPS                     | —  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Front / Rear Tires       | 11" x 6" – 5" (smooth)<br>20" x 8" – 8" (Turf Master®)           |  |  |   | 11" x 6" – 5" (smooth)<br>20" x 10" – 8" (Turf Master) |   | 11" x 6" – 5" (smooth)<br>20" x 12" – 8" (Turf Master)                          |         | 13" x 6.5" – 6" (smooth)<br>20" x 12" – 8" (Turf Master)                        |                    |                                   | 11" x 6" – 5" (smooth)<br>20" x 12" – 8" (Turf Master)                          |                                   |         |  |
| Rear Tow Hitch           | Standard   |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| COMFORT                  |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Seat                     | 20" high-back adjustable seat with suspension system             |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Steering                 | Overmolded soft-touch grips                                      |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Floor Mat                | Standard   |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| ADDITIONAL FEATURES      |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Additional Features      | Cup holder, dual LED headlights, multi-tool, removable floor pan |  |  |   |  |   | Cup holder, dual LED headlights, multi-tool, removable floor pan, steel fenders |         | Cup holder, dual LED headlights, multi-tool, removable floor pan and hour meter |                    |                                   | Cup holder, dual LED headlights, multi-tool, removable floor pan and hour meter |                                   |         |  |
| WARRANTY*                |  |  |  |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |
| Warranty                 | 3-year / no hour limit, limited product / limited lifetime frame |  | 3-year / no hour limit, limited product / limited lifetime frame and fabricated deck shell |   |  |   |   |         |   |                    |                                   |   |                                   |         |  |

† Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.  
\* As required by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer. As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.



| ZTS1™ 42  |  |  | ZTS1 46          |  |  | ZTS1 50   |  |  | ZTS2™ 50  |  |  | ZTS2 54   |  |  | ZTS2 60            |  |  | ZTX4™ 48  |  |  | ZTX4 54                 |  |  | ZTX4 60   |  |  | ZTX5™ 48  |  |  | ZTX5 54                                     |  |  | ZTX5 60            |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---|--|--|------------------|--|--|---|--|--|---|--|--|---|--|--|--------------------|--|--|---|--|--|-------------------------|--|--|---|--|--|---|--|--|---|--|--|--------------------|--|--|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 22 hp* Kohler KT 7000 Series V-twin OHV   |  |  |                  |  |  | 23 hp* Kohler KT7000 Series V-twin OHV                        |  |  |   |  |  | 23 hp* Kohler KT7000 PRO Series V-twin OHV                    |  |  |                    |  |  | 24 hp* Kohler KT7000 PRO Series V-twin OHV  |  |  |                         |  |  | 25 hp* Kohler KT7000 PRO Series V-twin OHV                |  |  |   |  |  | 23 hp* Kohler KT-Pro 7000 Series V-twin OHV |  |  |                    |  |  | 24 hp* Kohler KT-Pro 7000 Series V-twin OHV |  |  |  |  |  | 23 hp* Kohler Confidant ZT730 V-twin OHV |  |  |  |  |  | 25 hp* Kohler Confidant ZT740 V-twin OHV |  |  |  |  |  |
| 3.5 gal   |  |  |                  |  |  |   |  |  | 3.5 gal   |  |  |   |  |  |                    |  |  | 5.5 gal   |  |  |                         |  |  |   |  |  | 5.5 gal   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Dual Hydro-Gear® EZT 2200   |  |  |                  |  |  |   |  |  | Dual Hydro-Gear ZT 2800   |  |  |   |  |  |                    |  |  | Dual Hydro-Gear ZT 3100   |  |  |                         |  |  |   |  |  | Dual Hydro-Gear ZT 3200   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Up to 7 mph / 3.5 mph   |  |  |                  |  |  |   |  |  | Up to 7.5 mph / 3.5 mph   |  |  |   |  |  |                    |  |  | Up to 8 mph / 3.5 mph   |  |  |                         |  |  |   |  |  | Up to 8.5 mph / 3.5 mph   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Steering wheel with Synchro-Steer™ technology   |  |  |                  |  |  |   |  |  | Steering wheel with Synchro-Steer technology  |  |  |   |  |  |                    |  |  | Lap bar   |  |  |                         |  |  |   |  |  | Lap bar   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| RevTEK™ reverse mowing technology   |  |  |                  |  |  |   |  |  | RevTEK reverse mowing technology  |  |  |   |  |  |                    |  |  | Standard  |  |  |                         |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Standard lever  |  |  |                  |  |  |   |  |  | Standard lever  |  |  |   |  |  |                    |  |  | Integrated system in lap bars   |  |  |                         |  |  |   |  |  | Integrated system in lap bars   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 11-gauge AeroForce™ fabricated deck   |  |  |                  |  |  |   |  |  | 11-gauge AeroForce fabricated deck with leading-edge and trim-edge reinforcement                    |  |  |   |  |  |                    |  |  | 10-gauge AeroForce Max™ fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate          |  |  |                         |  |  |   |  |  | 10-gauge AeroForce Max fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate           |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 42" / twin blade  |  |  | 46" / twin blade |  |  | 50" / triple blade  |  |  | 50" / triple blade  |  |  | 54" / triple blade  |  |  | 60" / triple blade |  |  | 48" / triple blade  |  |  | 54" / triple blade      |  |  | 60" / triple blade  |  |  | 48" / triple blade  |  |  | 54" / triple blade                          |  |  | 60" / triple blade |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1" – 4.5"   |  |  |                  |  |  |   |  |  | 1" – 4.5"   |  |  |   |  |  |                    |  |  | 1" – 4.75" / 5" transport   |  |  |                         |  |  |   |  |  | 1" – 4.75" / 5" transport   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2 front   |  |  |                  |  |  | 2 front / 1 nose roller                                       |  |  |   |  |  | 2 front / 1 nose roller                                       |  |  |                    |  |  | 2 front deck wheels   |  |  | 2 front / 1 nose roller |  |  |   |  |  | 2 front deck wheels   |  |  | 2 front / 1 nose roller                     |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Electronic fingertip engagement   |  |  |                  |  |  |   |  |  | Electronic fingertip engagement   |  |  |   |  |  |                    |  |  | Electronic fingertip engagement   |  |  |                         |  |  |   |  |  | Electronic fingertip engagement   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Foot-operated / 15 positions / dial adjust  |  |  |                  |  |  |   |  |  | Foot-operated / 15 positions / dial adjust  |  |  |   |  |  |                    |  |  | Foot-operated / 17 positions / dial adjust / transport mode   |  |  |                         |  |  |   |  |  | Foot-operated / 17 positions / dial adjust / transport mode   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —   |  |  |                  |  |  |   |  |  | —   |  |  |   |  |  |                    |  |  | —   |  |  |                         |  |  |   |  |  | —   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Sealed ball bearing spindles / maintenance-free   |  |  |                  |  |  |   |  |  | Sealed ball bearing spindles / maintenance-free   |  |  |   |  |  |                    |  |  | Sealed ball bearing spindles / maintenance-free   |  |  |                         |  |  |   |  |  | Sealed ball bearing spindles / maintenance-free   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Square 2" x 2" tubular upper and lower frame structure  |  |  |                  |  |  |   |  |  | Square 2" x 2" tubular upper and lower frame structure  |  |  |   |  |  |                    |  |  | Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |  |                         |  |  |   |  |  | Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Rectangular 2" x 2.5" square frame  |  |  |                  |  |  |   |  |  | Rectangular 2" x 2.5" square frame  |  |  |   |  |  |                    |  |  | Rectangular 1.5" x 3" tubular frame / offset  |  |  |                         |  |  |   |  |  | Rectangular 1.5" x 3" tubular frame / offset / front caster suspension                                |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| —   |  |  |                  |  |  |   |  |  | —   |  |  |   |  |  |                    |  |  | Standard  |  |  |                         |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 13" x 6.5" – 6" (Turf Master)<br>20" x 8" – 8" (Turf Master)  |  |  |                  |  |  | 13" x 6.5" – 6" (Turf Master)<br>20" x 10" – 8" (Turf Master) |  |  |   |  |  | 13" x 6.5" – 6" (Turf Master)<br>20" x 12" – 8" (Turf Master) |  |  |                    |  |  | 13" x 6.5" – 6" (smooth)<br>22" x 12" – 12" (Turf Master)   |  |  |                         |  |  | 13" x 6.5" – 6" (smooth)<br>23" x 12" – 12" (Turf Master) |  |  |   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Standard  |  |  |                  |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  | Standard  |  |  |                         |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 20" high-back adjustable seat with ball-bearing seat slide and suspension system                    |  |  |                  |  |  |   |  |  | 20" high-back adjustable seat with armrests, ball-bearing seat slide and suspension system          |  |  |   |  |  |                    |  |  | 20" high-back adjustable seat with cushioned armrests, ball-bearing seat slide and suspension system  |  |  |                         |  |  |   |  |  | 24" high-back adjustable seat with cushioned armrests, ball-bearing seat slide and suspension system  |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Soft-Touch steering wheel with adjustable steering column   |  |  |                  |  |  |   |  |  | Soft-Touch steering wheel with adjustable steering column   |  |  |   |  |  |                    |  |  | Overmolded soft-touch grips   |  |  |                         |  |  |   |  |  | Overmolded soft-touch grips   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Standard  |  |  |                  |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  | Standard  |  |  |                         |  |  |   |  |  | Standard  |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Cup holder, dual LED headlights, multi-tool, removable floor pan                                    |  |  |                  |  |  |   |  |  | Cup holder, dual LED headlights, multi-tool, removable floor pan and hour meter                     |  |  |   |  |  |                    |  |  | Cup holder, dual LED headlights, removable floor pan and hour meter                                   |  |  |                         |  |  |   |  |  | Cup holder, dual LED headlights, removable floor pan and hour meter                                   |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3-year / no hour limit, limited product warranty / limited lifetime frame and fabricated deck shell |  |  |                  |  |  |   |  |  | 3-year / no hour limit, limited product warranty / limited lifetime frame and fabricated deck shell |  |  |   |  |  |                    |  |  | 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty |  |  |                         |  |  |   |  |  | 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty |  |  |   |  |  |                    |  |  |   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

† Limited warranty — normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

\* As required by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940 as rated by engine manufacturer. As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

| ZTX6™ 54  |  | ZTX6 60            |  | ZTXS4™ 48   |  | ZTXS4 54                                    |  | ZTXS4 60           |  | ZTXS5™ 54                                |  | ZTXS5 60  |  | ZTXS6™ 60                          |  |   |  |
|---|--|--------------------|--|---|--|---|--|--------------------|--|--|--|---|--|------------------------------------|--|---|--|
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| 25.5 hp* Kawasaki FX801 V-twin OHV  |  |                    |  | 23 hp* Kohler KT-Pro 7000 Series V-twin OHV   |  | 24 hp* Kohler KT-Pro 7000 Series V-twin OHV |  |                    |  | 25 hp* Kohler Confidant ZT740 V-twin OHV |  |   |  | 25.5 hp* Kawasaki FX801 V-twin OHV |  |   |  |
| 5.5 gal   |  |                    |  | 5.5 gal   |  |   |  |                    |  |  |  | 5.5 gal   |  |                                    |  | 5.5 gal   |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| Dual Hydro-Gear ZT 3400   |  |                    |  | Dual Hydro-Gear ZT 3100   |  |   |  |                    |  |  |  | Dual Hydro-Gear ZT 3200   |  |                                    |  | Dual Hydro-Gear ZT 3400   |  |
| Up to 9 mph / 3.5 mph   |  |                    |  | Up to 8 mph / 3.5 mph   |  |   |  |                    |  |  |  | Up to 8.5 mph / 3.5 mph   |  |                                    |  | Up to 9 mph / 3.5 mph   |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| Lap bar   |  |                    |  | Steering wheel with Synchro-Steer™ technology   |  |   |  |                    |  |  |  | Steering wheel with Synchro-Steer™ technology   |  |                                    |  | Steering wheel with Synchro-Steer™ technology   |  |
| Standard  |  |                    |  | RevTEK reverse mowing technology  |  |   |  |                    |  |  |  | RevTEK reverse mowing technology  |  |                                    |  | RevTEK reverse mowing technology  |  |
| Integrated system in lap bars   |  |                    |  | Standard lever  |  |   |  |                    |  |  |  | Standard lever  |  |                                    |  | Standard lever  |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| 10-gauge AeroForce Max fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate               |  |                    |  | 10-gauge AeroForce Max™ fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate          |  |   |  |                    |  |  |  | 10-gauge AeroForce Max fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate           |  |                                    |  | 10-gauge AeroForce Max fabricated / 2-gauge reinforcement / 7-gauge side wraps / skid plate               |  |
| 54" / triple blade  |  | 60" / triple blade |  | 48" / triple blade  |  | 54" / triple blade                          |  | 60" / triple blade |  | 54" / triple blade                       |  | 60" / triple blade  |  | 60" / triple blade                 |  |   |  |
| 1" – 4.75" / 5" transport   |  |                    |  | 1" – 4.75" / 5" transport   |  |   |  |                    |  |  |  | 1" – 4.75" / 5" transport   |  |                                    |  | 1" – 4.75" / 5" transport   |  |
| 2 front / 1 nose roller   |  |                    |  | 2 front deck wheels   |  | 2 front / 1 nose roller                     |  |                    |  |  |  | 2 front / 1 nose roller   |  |                                    |  | 2 front / 1 nose roller   |  |
| Electronic fingertip engagement   |  |                    |  | Electronic fingertip engagement   |  |   |  |                    |  |  |  | Electronic fingertip engagement   |  |                                    |  | Electronic fingertip engagement   |  |
| Foot-operated / 17 positions / dial adjust / transport mode   |  |                    |  | Foot-operated / 17 positions / dial adjust / transport mode   |  |   |  |                    |  |  |  | Foot-operated / 17 positions / dial adjust / transport mode   |  |                                    |  | Foot-operated / 17 positions / dial adjust / transport mode   |  |
| —   |  |                    |  | —   |  |   |  |                    |  |  |  | —   |  |                                    |  | —   |  |
| Sealed ball bearing spindles / maintenance-free   |  |                    |  | Sealed ball bearing spindles / maintenance-free   |  |   |  |                    |  |  |  | Sealed ball bearing spindles / maintenance-free   |  |                                    |  | Sealed ball bearing spindles / maintenance-free   |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |                    |  | Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |   |  |                    |  |  |  | Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |                                    |  | Rectangular 1.5" x 3" tubular upper and lower frame structure   |  |
| Rectangular 1.5" x 3" tubular frame / offset / front caster suspension                                    |  |                    |  | Rectangular 1.5" x 3" tubular frame / offset  |  |   |  |                    |  |  |  | Rectangular 1.5" x 3" tubular frame / offset  |  |                                    |  | Rectangular 1.5" x 3" tubular frame / offset  |  |
| Standard  |  |                    |  | Standard  |  |   |  |                    |  |  |  | Standard  |  |                                    |  | Standard  |  |
| 13" x 6.5" – 6" (smooth)<br>24" x 12" – 12" (Turf Master)   |  |                    |  | 13" x 6.5" – 6" (Turf Master)<br>22" x 12" – 12" (Turf Master)  |  |   |  |                    |  |  |  | 13" x 6.5" – 6" (Turf Master)<br>23" x 12" – 12" (Turf Master)  |  |                                    |  | 13" x 6.5" – 6" (Turf Master)<br>24" x 12" – 12" (Turf Master)  |  |
| Standard  |  |                    |  | Standard  |  |   |  |                    |  |  |  | Standard  |  |                                    |  | Standard  |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| 24" high back adjustable seat with cushioned armrests, ball-bearing seat slide and full suspension system |  |                    |  | 20" high-back adjustable seat with cushioned armrests, ball-bearing seat slide and suspension system  |  |   |  |                    |  |  |  | 24" high-back adjustable seat with cushioned armrests, ball-bearing seat slide and suspension system  |  |                                    |  | 24" high back adjustable seat with cushioned armrests, ball-bearing seat slide and full suspension system |  |
| Overmolded soft-touch grips   |  |                    |  | Soft-Touch steering wheel with adjustable steering column   |  |   |  |                    |  |  |  | Soft-Touch steering wheel with adjustable steering column   |  |                                    |  | Soft-Touch steering wheel with adjustable steering column   |  |
| Standard  |  |                    |  | Standard  |  |   |  |                    |  |  |  | Standard  |  |                                    |  | Standard  |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| Cup holder, dual LED headlights, removable floor pan and hour meter                                       |  |                    |  | Cup holder, dual LED headlights, removable floor pan and hour meter                                   |  |   |  |                    |  |  |  | Cup holder, dual LED headlights, removable floor pan and hour meter                                   |  |                                    |  | Cup holder, dual LED headlights, removable floor pan and hour meter                                       |  |
|   |  |                    |  |   |  |   |  |                    |  |  |  |   |  |                                    |  |   |  |
| 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty     |  |                    |  | 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty |  |   |  |                    |  |  |  | 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty |  |                                    |  | 4-year 800 hours limited product warranty / limited lifetime frame and fabricated deck shell warranty     |  |



| ELECTRIC<br>LITHIUM ION  |   |
|--------------------------|---|
| ZT1 42E                  |   |
| POWER SOURCE             |   |
| Battery                  | 56V MAX*-3000Wh-60Ah  |
| Battery Type             | Lithium-ion   |
| Charger                  | 110V fast charger   |
| DRIVE SYSTEM             |   |
| Transmission             | Electric drive  |
| Forward / Reverse Speeds | Up to 7 mph / 3.5 mph   |
| CONTROLS                 |   |
| Steering                 | Lap bar   |
| Mow in Reverse           | —   |
| Parking Brake            | Foot-controlled   |
| CUTTING DECK             |   |
| Deck Construction        | 13-gauge stamped deck   |
| Cutting Width / Blades   | 42" / twin blade  |
| Deck Cutting Height      | 1" – 4.5"   |
| Anti-Scalping Wheels     | 2 front   |
| Deck Blade Engagement    | Electric  |
| Deck Lift                | Foot-operated / 15 positions / dial adjust  |
| Deck Wash                | —   |
| Spindle Construction     | Brushless motors  |
| CHASSIS                  |   |
| Frame                    | Square 2" x 2" tubular upper and lower frame structure  |
| Front / Rear Tires       | 11" x 6" – 5" (smooth)<br>20" x 8" – 8" (Turf Master)   |
| Rear Tow Hitch           | Standard  |
| COMFORT                  |   |
| Seat                     | 20" high-back adjustable seat with armrests, ball-bearing seat slide and suspension system                          |
| Steering                 | Overmolded soft-touch grips   |
| Floor Mat                | Standard  |
| ADDITIONAL               |   |
| Additional Features      | Cup holder, dual LED headlights, multi-tool, removable floor pan  |
| WARRANTY*                |   |
| Warranty                 | 3-year / no-hour-limit, limited product warranty /4-year battery, limited product warranty / limited lifetime frame |

\* Maximum initial battery voltage (measured without a workload) is 56 volts.  
Nominal voltage is 50.4 volts.

# GET MORE FROM YOUR ZERO-TURN.



Visit [cubcadet.com](https://cubcadet.com) to see our full range of accessories, get in-depth product details, reviews and ratings, and learn about the full strength of your Cub Cadet machine.

INDEPENDENT DEALER  
*Cub Cadet*

# YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

Cub Cadet dealers know their equipment. And they know how to take care of it and their customers. You'll get exceptional financing, great offers and the expertise you can only find from professionals who sell and service Cub Cadet equipment every day.

## SUPPORT AS STRONG AS OUR MACHINES

Dedicated personal owner support seven days a week.  
Visit [cubcadet.com](http://cubcadet.com) or call toll-free 1-877-428-2349.

 [facebook.com/cubcadet](https://facebook.com/cubcadet)  [@cubcadet\\_usa](https://twitter.com/cubcadet_usa)  [cubcadet\\_usa](https://www.instagram.com/cubcadet_usa)



EXCEPTIONAL  
FINANCING  
OFFERS\*

\*Restrictions apply. See dealer or [cubcadet.com/en\\_US/financing](http://cubcadet.com/en_US/financing) for details.

Images may not reflect dealer inventory and/or unit specifications.

Kohler® is a registered trademark of Kohler Co.

Kawasaki® is a registered trademark of KAWASAKI JUKOGYO KABUSHIKI KAISHA.

Tuff Torq® is a registered trademark of Kanzaki Kokyukoki Mfg. Co. Ltd.

Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership

Turf Master® is a registered trademark of The Carlstar Group LLC.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating the machine, read, understand and follow all instructions in the manual and on the machine. Specifications are subject to change without notice.



A man with a beard and sunglasses is operating a yellow Cub Cadet Pro Z 900 riding lawn mower in a green field under a blue sky with scattered clouds. The mower is yellow with black accents and has "PRO Z 900" written on its side. A thick yellow diagonal stripe runs across the top left corner of the image. The text "BUILT DIFFERENT" is written in large, white, bold, sans-serif capital letters, slanted upwards from left to right, positioned over a dark, textured diagonal band at the bottom of the image.

**BUILT  
DIFFERENT**

 **Cub Cadet**  
PRO SERIES







It's easy to stick with what you know.

But real progress starts with doing something **different**.

**Different** isn't afraid to stand out.

**Different** doesn't back down from an uphill battle.

**Different** pushes the limits of what's possible.

**Different** is the beating heart of innovation.

The Pro Series by Cub Cadet®

# BUILT DIFFERENT

[cubcadet.com/pro](http://cubcadet.com/pro)









# CONTENTS

**PRO Z™ SERIES**

**6-17**

**PRO Z™ SUREPATH**

**18-21**

**PRO X™ SERIES**

**22-25**

**PRO HW™ SERIES**

**26-29**

**ACCESSORIES**

**30-31**

**SPECIFICATIONS**

**32-35**







# PRO Z™ SERIES

## Your difference maker.

It takes a different kind of person to do what you do. And a different kind of machine. The PRO Z Series was built for exactly that. Maintenance-free spindles and EFI engine options amp up your productivity, while a fully welded frame and commercial-grade deck were engineered to stand up to tough demands for years to come. Add it to your crew and see the PRO Z difference for yourself.



### What makes the Pro Z™ Series different?

CATEGORY-EXCLUSIVE STEERING SYSTEMS

**EPS STEERING WHEEL & LAP BAR**

COMMERCIAL-GRADE STRENGTH

**7-GAUGE STEEL DECK**

EASY AND QUICK DECK ADJUSTMENTS

**ELECTRO-HYDRAULIC LIFT SYSTEM**

HILLSIDE STABILITY

**REAR DUAL-WHEEL TRACTION\***

PRISTINE PASSES

**MARBAIN® BLADES**

\*Only available on the PRO Z 900 Series

**“STICKS TO  
OUR PARK HILL  
LIKE GLUE.”**



**Indiana Groundskeeper  
PRO Z™ 972 SD**





## PRO Z 500

**HORSEPOWER:**  
Up to 27 hp\*\*

**ENGINE DISPLACEMENT:**  
852cc

**DECK SIZES:**  
54" and 60"

**REAR TIRES:**  
24" x 12" – 12"

**WARRANTY:**  
3-year limited,  
no-hour-limit warranty\*



## PRO Z 700

**HORSEPOWER:**  
Up to 31 hp\*\*

**ENGINE DISPLACEMENT:**  
999cc

**DECK SIZES:**  
60"

**REAR TIRES:**  
24" x 12" – 12"

**WARRANTY:**  
3-year limited,  
no-hour-limit warranty\*



## PRO Z 900

**HORSEPOWER:**  
Up to 38.5 hp\*\*

**ENGINE DISPLACEMENT:**  
999cc

**DECK SIZES:**  
60" and 72"

**REAR TIRES:**  
Up to 26" x 12" – 12"

**WARRANTY:**  
3-year limited,  
no-hour-limit warranty\*

## PRO Z ATTACHMENTS

Attachments Sold Separately



### PCS 1900 power collection system

19-inch diameter impeller housing and a 12-bushel, three-bag collection system.



### Mulch kit

Mulching your lawn clippings allows for quick decomposition and returns essential nutrients back to the yard.

# PRO Z™ DUAL-WHEEL SERIES

## Hillside stability solved.

You never back down from a challenge. That's why the PRO Z SD and SDL are dual-wheel commercial zero-turns specifically engineered to tackle challenging terrain with up to a 25-degree slope. And with up to 30 degrees of self-leveling air-ride seat comfort (exclusive to the SDL) these mowers are built to tackle properties with hilly and varying terrain.



### DUAL REAR WHEELS

Oversized dual rear wheels provide a high level of stability, traction and precision on the 972 SD and SDL.





## PRO Z 972 SD

HORSEPOWER:  
Up to 35 hp\*\*

SEAT SWIVEL:  
-

WARRANTY:  
3-year limited, no-hour-limit\*

DECK WARRANTY:  
5-year / 1,750-hour  
limited deck warranty\*




## PRO Z 972 SDL

HORSEPOWER:  
Up to 38.5 hp\*\*

SEAT SWIVEL:  
Self-leveling air-ride seat

WARRANTY:  
3-year limited, no-hour-limit\*

DECK WARRANTY:  
5-year / 1,750-hour  
limited deck warranty\*

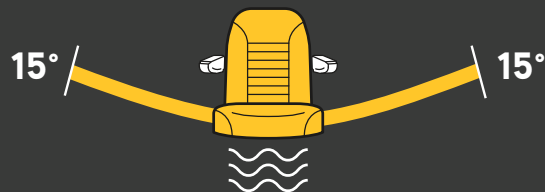


### MAXIMIZED COMFORT

The self-leveling air-ride seat on the PRO Z 972 SDL lets you operate with up to 15 degrees of self-leveling from side to side.

## HILLSIDE CONFIDENCE

Four-wheel steering control with power steering for hillside stability.

- A** Up to a 25-degree slope
- B** Category exclusive steering wheel control with power steering
- C** Dual wheel traction control

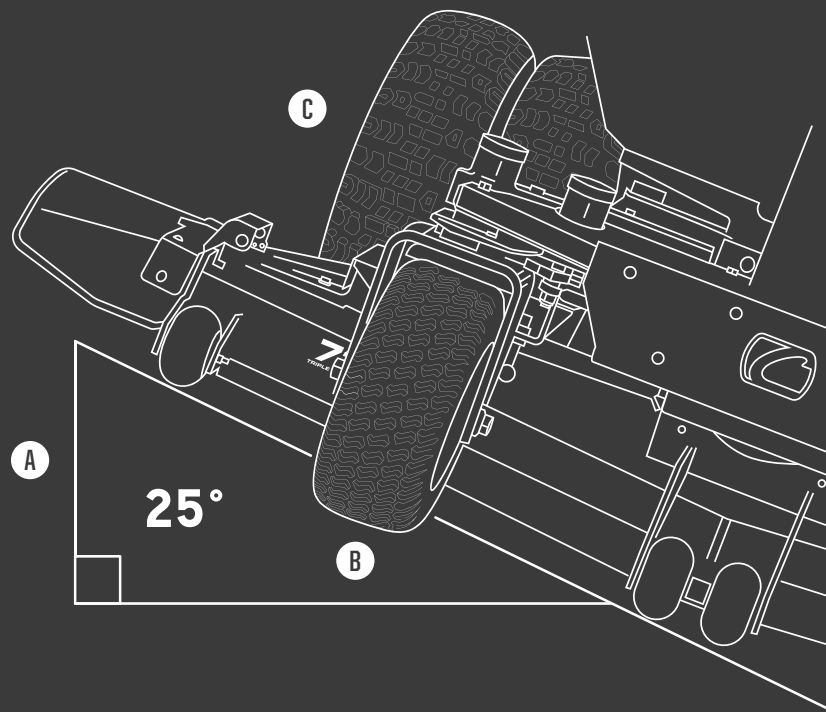

Deck size: 72"

# PRO Z™ COMFORT

## A different level of comfort.

When days are as long as yours, comfort isn't just nice to have—it's necessary. That's why we made the PRO Z Series ride as smooth as possible. Innovative features like the isolation dampening system and air-ride suspension help absorb impacts of the job, while adjustable seat firmness, lumbar support and padded armrests provide additional comfort so you'll be able to go the distance.






## PRO Z AIR-RIDE SEAT

Our air-ride seat allows riders to adjust seat firmness to their personal preference. Standard on the PRO Z 900.

- A** Air-ride control
- B** EVC cushion (elastic vibration control)
- C** Isolation-dampening system
- D** Angle-back adjustment
- E** Adjustable padded armrests
- F** Adjustable lumbar support

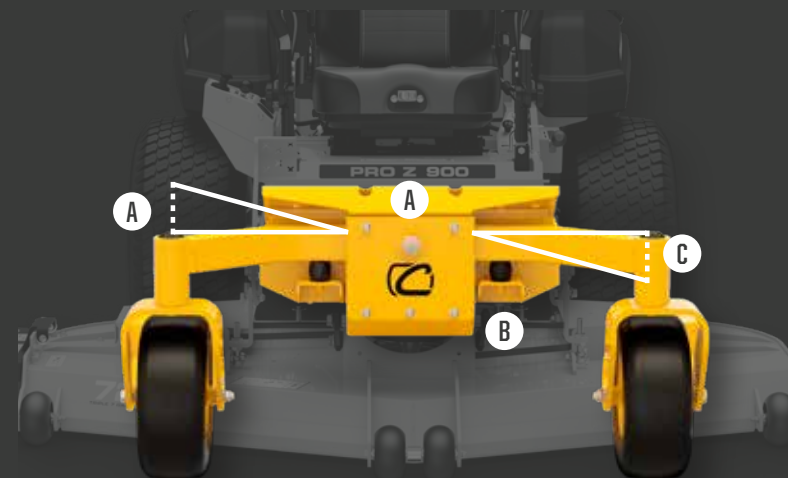

## PIVOTING FRONT AXLE WITH ISOLATION-DAMPENING SYSTEM MOUNTS

A pivoting front axle allows the front end of the PRO Z to ride across unknown terrain while helping protect the quality of the cut.

The frame and axle float as the PRO Z moves, allowing the deck to follow the shape of the terrain and help avoid scalping.

- A** 2 1/4" of travel  
(4 1/2" of total travel)
- B** Isolation-dampening system  
(standard on the PRO Z 700 and 900 Series)
- C** Maximum angle of travel up to 6 degrees

# PRO Z<sup>TM</sup> STRENGTH

## Strength without compromise.

You expect the best and the PRO Z Series deck delivers. Fully fabricated and triple plated steel thickness with top and bottom reinforcements—so you can power through the rigors of your job, day in and day out.





## DECKS BUILT TO LAST


Tackle tough conditions with a triple-7-gauge steel cutting deck: a 7-gauge deck shell with 7-gauge top and bottom reinforcements.

### Durability

- A** 1/4" leading rolled edge
- B** 5/16" steel side reinforcements
- C** 3/4" wear guard
- \*** Maintenance-free spindle assembly

### Quality Cut

- D** Flexible rubber discharge chute
- E** High-lift Marbain® blades  
(with blade tip speed up to 18,500 fpm)
- F** Adjustable rear striping roller  
(standard on the PRO Z 700 and 900 Series)

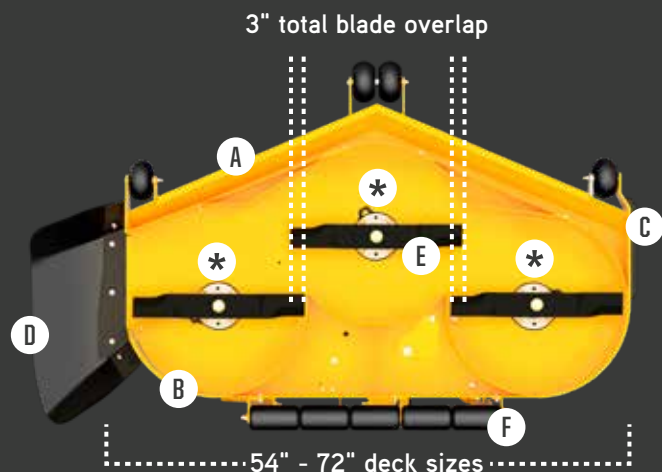

## HARD-WORKING FRONT END

Help absorb the impact of rough terrain with new front-end construction featuring a combination of axle, hub and yoke size.


- A** 2" x 3" pivoting front axle
- B** Isolation-dampening system  
(standard on the PRO Z 700 and 900 Series)
- C** 5" steel hubs
- D** 1/2" thick steel front yokes
- \*** Sealed maintenance-free ball bearings



# PRO Z™ PERFORMANCE

## Built to meet high standards.

High standards like yours need high performance. That's why the PRO Z Series was engineered for consistent cut quality, in varying conditions. Featuring high-torque, commercial transmissions and high-horsepower, commercial-grade engines for optimal blade tip speed—and precise, single passes through thick grass.

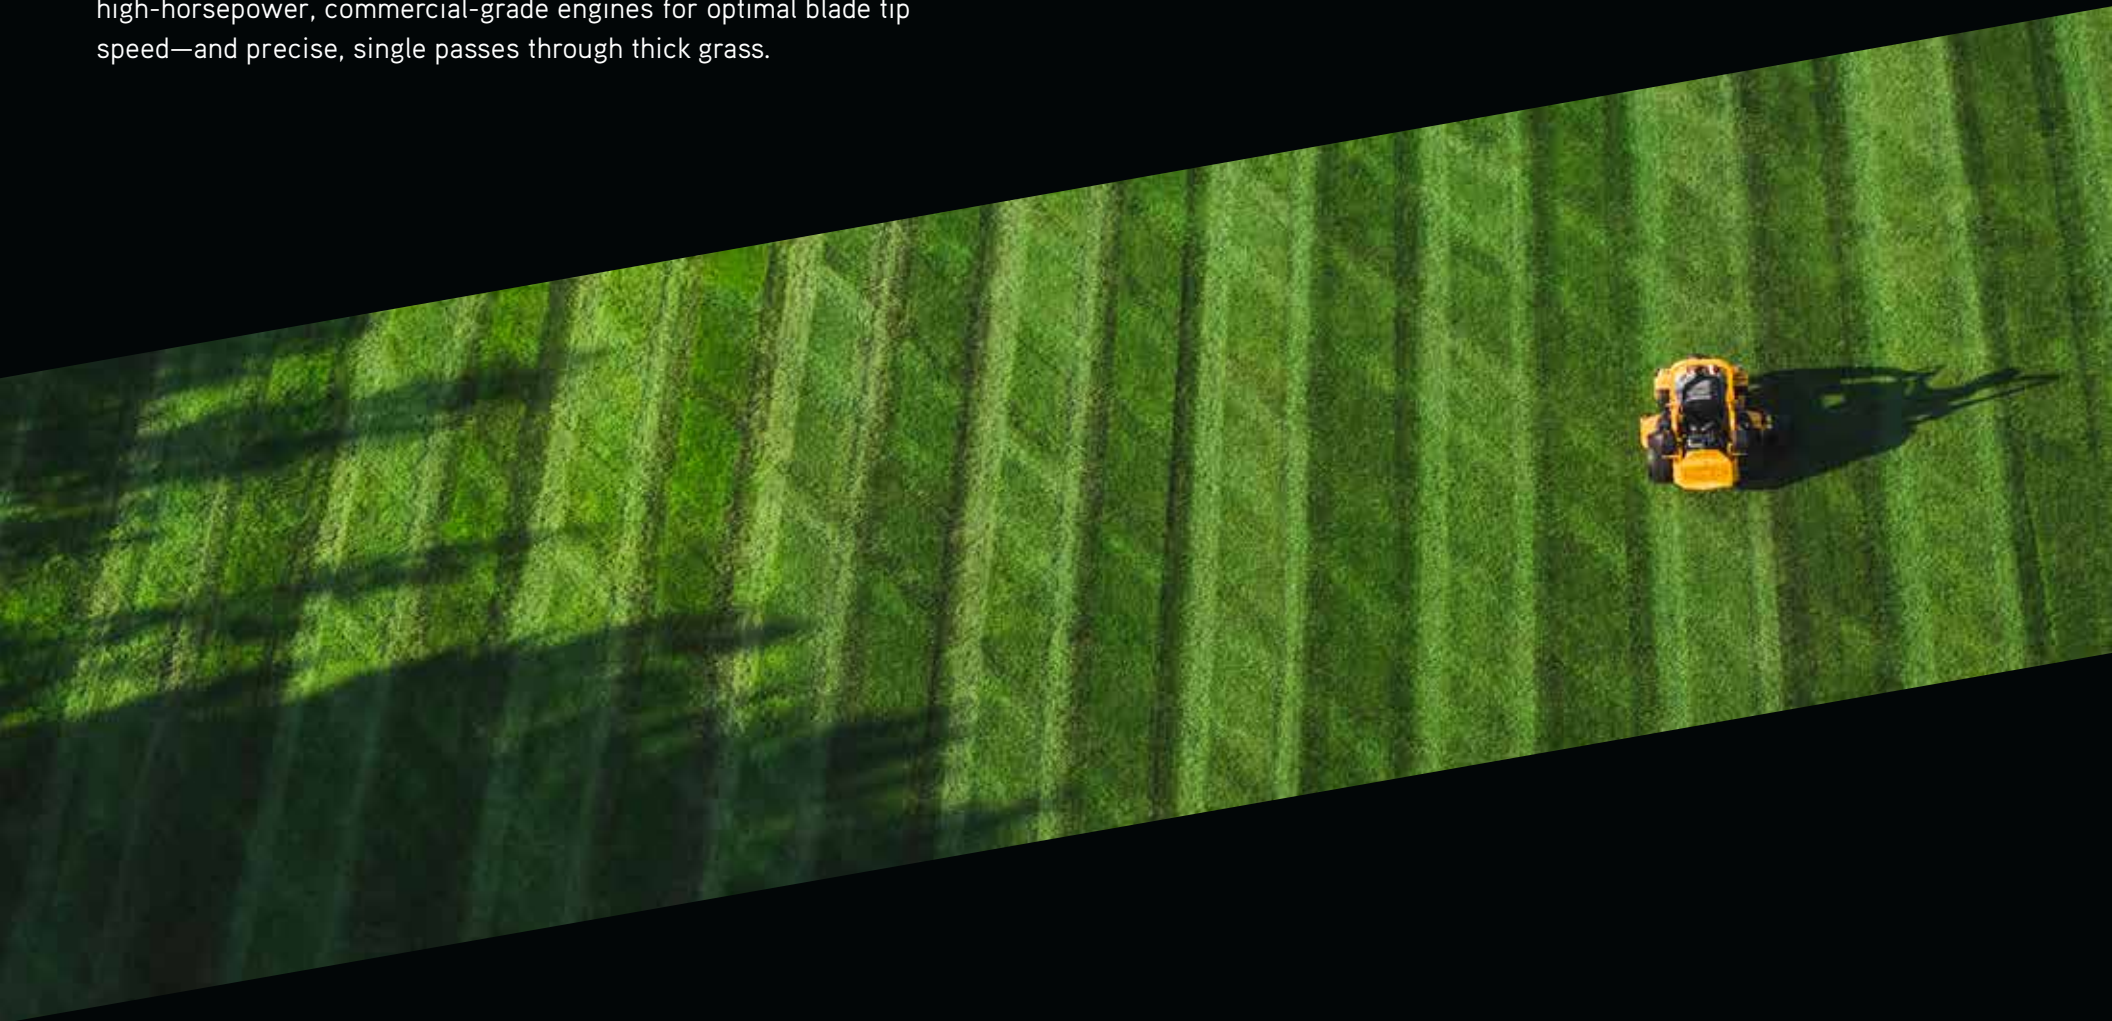



## POWERFUL KAWASAKI® ENGINES




EFI engine technology available on select models

- Designed to deliver excellent horsepower
- Optimal balance of torque and power
- Maximum blade tip speed up to 18,500 fpm


Shown above:  
Kawasaki FX Series 38.5 hp\*\* (999cc)

## MAX SPEED

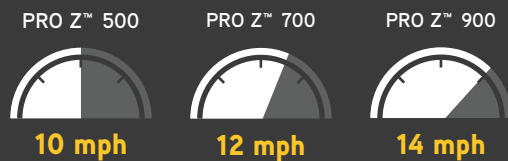

## COMMERCIAL-QUALITY CUT AT HIGH SPEEDS


High-lift Marbain® blades with  
blade tip speed up to 18,500 fpm

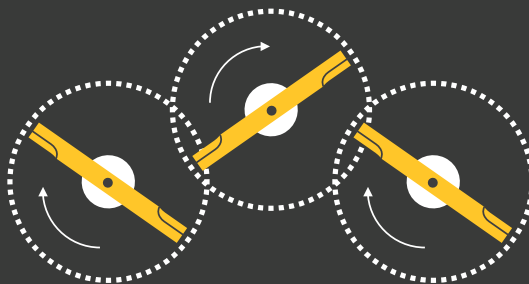

3" total blade overlap  
(help save time by cutting more grass in one pass)

## ENGINE HORSEPOWER AND TORQUE

▨ Horsepower [hp] ● Torque [ft-lb]

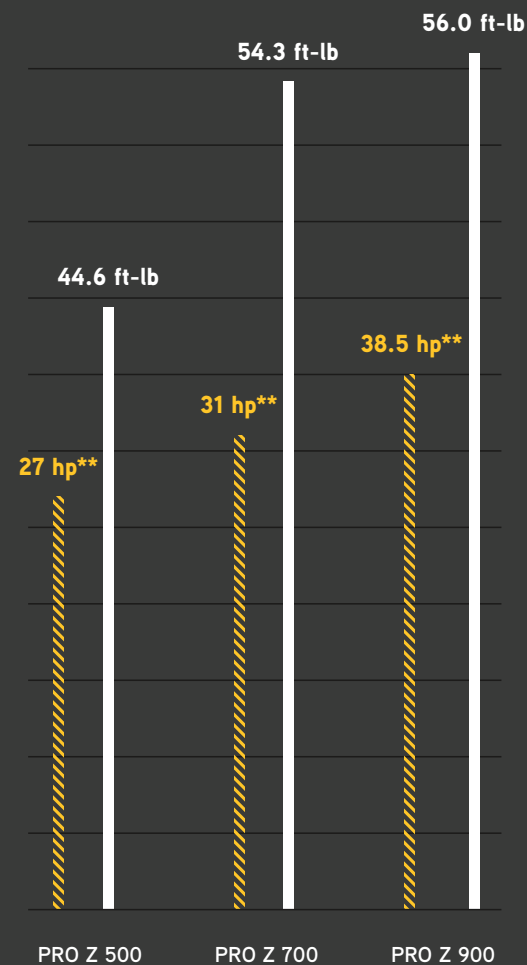





# PRO Z™ SUREPATH™

## A whole different kind of machine.

You're always looking for an edge—and SurePath Auto Steer technology is it. Cub Cadet's first GPS-operated and semi-autonomous mower. Designed to minimize overlap and hold straight lines while also making turns with a push of a button—this can save you and your crew valuable time and effort. SurePath technology only available with Cub Cadet.



### What makes the SurePath™ Series different?

CUB CADET'S FIRST  
**GPS-OPERATED**

ADVANCED TECHNOLOGY  
**SIMPLE THREE-STEP OPERATION**

HELPS MINIMIZE EFFORT  
**SEMI-AUTONOMOUS STEERING**

PRISTINE STRIPING  
**AUTO STEER CONSISTENCY**

HELPS PREVENT TURFING  
**AUTO TURNS**









# +7.45"

## MORE COVERAGE PER STRIPE\*\*\*

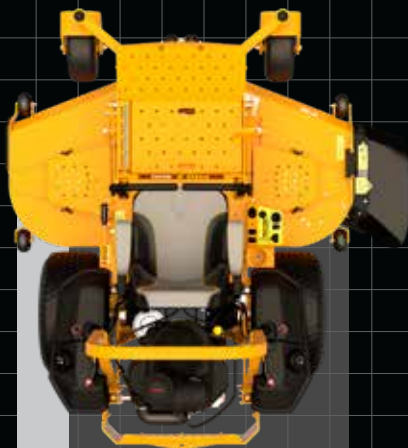

# 11.2"

### LAP BAR STRIPING OVERLAP

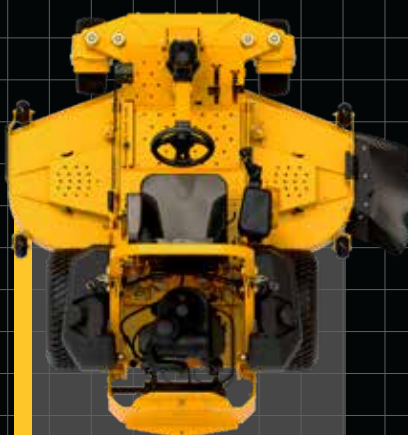

# 3.75"

### SUREPATH™ STRIPING OVERLAP



## PRO Z 960 SP

HORSEPOWER:

Up to 35 hp\*\*

ENGINE DISPLACEMENT:

999cc

CUTTING WIDTH:

60"

FORWARD SPEED:

Up to 14 mph

WARRANTY:

3-year limited, no-hour-limit\*

DECK WARRANTY:

5-year / 1,750-hour  
limited deck warranty\*



## PRO Z 972 SP

HORSEPOWER:

Up to 35 hp\*\*

ENGINE DISPLACEMENT:

999cc

CUTTING WIDTH:

72"

FORWARD SPEED:

Up to 14 mph

WARRANTY:

3-year limited, no-hour-limit\*

DECK WARRANTY:

5-year / 1,750-hour  
limited deck warranty\*

\*\*\* SurePath efficiency and savings statistics are intended for illustrative purposes only. The efficiency and savings information presented is mathematically extrapolated from the measured overlap improvements between a Cub Cadet SurePath-equipped commercial zero-turn mower with a 72-inch cutting deck/cut width compared with an otherwise identically equipped Cub Cadet mower with traditional lap bar striping controls operated by a variety of professional landscapers in controlled conditions. The overlap improvements were measured by a third-party testing firm, which also extrapolated those results based on the commercial mowing industry norms and standards they identified. Actual results in the field will vary based on operator preferences, mowing conditions, terrain, site configurations and other factors.

Cub Cadet commercial products are intended for professional use. SurePath functionality is based on market availability. Programs and specs subject to change without notice.





# PRO X<sup>TM</sup> SERIES

## Different done better.

Your business stands apart. Your machines should too. The PRO X Series takes stand-on productivity to the next level with zero-turn maneuverability, easy-to-adjust suspension and a fully fabricated deck—helping your operation go further.



### What makes the Pro X<sup>TM</sup> Series different?

COMPACT FOOTPRINT

**OCCUPIES LITTLE TRAILER SPACE**

EXCELLENT GROUND CLEARANCE

**24-INCH TIRES**

OPTIMAL PERFORMANCE

**INTUITIVE MANEUVERABILITY**

IMPACT ABSORPTION

**ADJUSTABLE SUSPENSION**

STRENGTH WITHOUT COMPROMISE

**ULTRA-COMFORTABLE RIDE**

“

**MAN, I FEEL 10 YEARS YOUNGER. I'M  
TIME EFFICIENT, MY CUT'S A LOT BETTER.  
IT'S OVERALL, JUST THE REAL DEAL.**



**Joe Dunbar**  
Smokin' Joes Lawn Care

”





## PRO X 636

**HORSEPOWER:**  
Up to 18.5 hp\*\*

**ENGINE DISPLACEMENT:**  
603cc

**CUTTING WIDTH:**  
36"

**REAR TIRES:**  
21" x 8.5" – 10"

**DECK WARRANTY:**  
2-year limited,  
no-hour-limit  
manufacturer's warranty\*



## PRO X 648

**HORSEPOWER:**  
Up to 22 hp\*\*

**ENGINE DISPLACEMENT:**  
726cc

**CUTTING WIDTH:**  
48"

**REAR TIRES:**  
24" x 9.5" – 12"

**DECK WARRANTY:**  
5-year limited,  
1,750-hour limited  
manufacturer's warranty\*



## PRO X 654

**HORSEPOWER:**  
Up to 29.5 hp\*\*

**ENGINE DISPLACEMENT:**  
852cc

**CUTTING WIDTH:**  
54"

**REAR TIRES:**  
24" x 12" – 12"

**DECK WARRANTY:**  
5-year limited,  
1,750-hour limited  
manufacturer's warranty\*



## PRO X 660

**HORSEPOWER:**  
Up to 29.5 hp\*\*

**ENGINE DISPLACEMENT:**  
852cc

**CUTTING WIDTH:**  
60"

**REAR TIRES:**  
24" x 12" – 12"

**DECK WARRANTY:**  
5-year limited,  
1,750-hour limited  
manufacturer's warranty\*

## PRO X ATTACHMENTS

Attachments Sold Separately



### Side bagger

Side-mounted steel bagger with 4.3 cu-ft of capacity for grass, leaves and debris.



### Light kit

Help illuminate your mowing path with the easy-to-install pre-wired LED light kit that has pre-drilled mounting points.







# PRO HW™ SERIES

## Cut with more confidence.

You don't settle for average. That's why these walk-behinds are anything but. The durable PRO HW Series is tough enough to handle long days and demanding jobs while the innovative steering allows you to command every pass with precision and minimal effort. The result? A pristine and efficient cut, season after season.



### What makes the Pro HW™ Series different?

STRENGTH

**FULLY FABRICATED DECK**

SPEED CONTROL

**HYDRO DRIVE SYSTEM**

EASY STEERING

**MULTI- OR EASY-TRAC STEERING**

PERFORMANCE

**HIGH-LIFT MARBAIN® BLADES**

STRENGTH

**10-GAUGE STEEL DECK**









## PRO HW 336

**HORSEPOWER:**  
Up to 14.5 hp\*\*

**ENGINE MANUFACTURER:**  
Kawasaki® FS481v - recoil start

**CUTTING WIDTH:**  
36"

**REAR TIRES:**  
18" x 6.5" – 8"

**WARRANTY:**  
2-year limited, no-hour-limit warranty\*



## PRO HW 348

**HORSEPOWER:**  
Up to 15 hp\*\*

**ENGINE MANUFACTURER:**  
Kawasaki FS541v - electric start

**CUTTING WIDTH:**  
48"

**REAR TIRES:**  
20" x 10" – 8"

**WARRANTY:**  
2-year limited, no-hour-limit warranty\*



## PRO HW 354

**HORSEPOWER:**  
Up to 18.5 hp\*\*

**ENGINE MANUFACTURER:**  
Kawasaki FS600v - electric start

**CUTTING WIDTH:**  
54"

**REAR TIRES:**  
20" x 10" – 8"

**WARRANTY:**  
2-year limited, no-hour-limit warranty\*

## PRO HW ATTACHMENTS

Attachments Sold Separately



### Trash collector bag

Mesh bag with three compartments that can be used for debris pickup or water bottles.



### Sulky

Convert your PRO HW into a stand-on riding mower with a single-wheel sulky or two-wheel sulky for more stability.

ACCESSORIES

|   | PRO Z™ 500 |         |         |         | PRO Z 700 |         |
|---|------------|---------|---------|---------|-----------|---------|
|   | Z 554 L    | Z 554 S | Z 560 L | Z 560 S | Z 760 L   | Z 760 S |
| BAGGING SYSTEMS                                 |            |         |         |         |           |         |
| Power-Assist Triple Bagger                      | •          | •       | •       | •       | •         | •       |
| Power-Assist Clamshell Bagger                   | •          | •       | •       | •       | •         | •       |
| Bagger Weight Kit / Front Weight Kit            | •          |         | •       |         | •         |         |
| PRO Z Triple Bag Kit                            | •          | •       | •       | •       | •         | •       |
| Blower Mounting Kit                             | •          | •       | •       | •       | •         | •       |
| PRO Z Blower Fan Assembly                       | •          | •       | •       | •       | •         | •       |
| Mulching Kit                                    | •          | •       | •       | •       | •         | •       |
| 4.3 cu-ft Steel Bagger                          |            |         |         |         |           |         |
| Bagger Mount Kit                                |            |         |         |         |           |         |
| DECK MOUNTED STRIPING KITS                      |            |         |         |         |           |         |
| Deck-Mounted Striping Kit                       |            |         |         |         |           |         |
| Deck-Mounted Striping Roller Kit                | •          | •       | •       | •       |           |         |
| ELECTRONICS                                     |            |         |         |         |           |         |
| 12V Outlet Kit (dash-mounted)                   | •          | •       | •       | •       | •         | •       |
| Light Kit                                       | •          | •       | •       | •       | •         | •       |
| SNOW ATTACHMENTS AND ACCESSORIES                |            |         |         |         |           |         |
| Tire chains                                     | •          | •       | •       | •       | •         | •       |
| OTHER   |            |         |         |         |           |         |
| Electronic / Power Deck Lift Kit (dash-mounted) | •          | •       | •       | •       | •         | •       |
| 24" Traction Tire / Rim (set of 2)              | •          | •       | •       | •       | •         | •       |
| 26" Traction Tire / Rim (set of 2)              |            |         |         |         |           |         |
| Caster Wheel Kit (deck-mounted)                 |            |         | •       | •       | •         | •       |
| 24" x 12" – 12" Single Tire / Rim               | •          | •       | •       | •       | •         | •       |
| 26" x 12" – 12" Single Tire / Rim               |            |         |         |         |           |         |
| Mesh Storage Bag                                |            |         |         |         |           |         |
| Single-Wheel Sulky                              |            |         |         |         |           |         |
| Two-Wheel Sulky                                 |            |         |         |         |           |         |
| Discharge Block-Off Kit                         |            |         |         |         |           |         |



# PRO Z 900

# PRO X™

# PRO HW™

| Z 960 L | Z 960 S | Z 972 L | Z 972 S | Z 972 SD/SDL | Z 960 S SP | Z 972 S SP | X 636 | X 648 | X 654 | X 660 | HW 336 | HW 348 | HW 354 |
|---------|---------|---------|---------|--------------|------------|------------|-------|-------|-------|-------|--------|--------|--------|
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       |         |         |              | •          |            |       |       |       |       |        |        |        |
| •       | •       |         |         |              | •          |            |       |       |       |       |        |        |        |
| •       |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       |         |         |              | •          |            |       |       |       |       |        |        |        |
| •       | •       |         |         |              | •          |            |       |       |       |       |        |        |        |
| •       | •       |         |         |              | •          |            |       |       |       |       |        |        |        |
| •       | •       | •       | •       | •            | •          | •          | •     | •     | •     | •     | •      | •      | •      |
|         |         |         |         |              |            |            | •     | •     | •     | •     | •      | •      | •      |
|         |         |         |         |              |            |            |       | •     | •     | •     | •      | •      | •      |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       | •     | •     | •     |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       | •       | •       |              | •          | •          | •     | •     | •     | •     |        |        |        |
| •       | •       | •       | •       | •            | •          | •          | •     | •     | •     | •     | •      | •      | •      |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       | •       | •       | •            | •          | •          |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       | •       | •       |              | •          | •          |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       |        |        |        |
| •       | •       | •       | •       |              | •          | •          |       |       |       |       |        |        |        |
|         |         |         |         |              |            |            |       |       |       |       | •      | •      | •      |
|         |         |         |         |              |            |            |       |       |       |       | •      | •      | •      |
|         |         |         |         |              |            |            |       |       |       |       | •      | •      | •      |
|         |         |         |         |              |            |            |       | •     | •     | •     |        |        |        |

PRO Z™ SERIES

PRO Z™ 500

PRO Z 700

|  | Z 554 L/S KW   | Z 560 L/S KW      | Z 760 L/S KW  |
|--|--|-------------------|---|
| ENGINE AND DRIVE SYSTEM                    |  |                   |   |
| Engine / Manufacturer                      | Kawasaki® FX850v   |                   | Kawasaki FX921v   |
| Horsepower                                 | 27 hp**  |                   | 31 hp**   |
| Displacement                               | 852cc  |                   | 999cc   |
| Fuel Capacity                              | 14.9 gal (twin 7.45 gal tanks) with dial gauge   |                   | 14.9 gal (twin 7.45 gal tanks) with electric gauge  |
| Transmission                               | 12cc Parker® HTJ pump with hydro release lever   |                   | 14cc Parker HTG pump with hydro release lever   |
| Ground Speed (forward/reverse)             | Up to 10 mph / 5 mph   |                   | Up to 12 mph / 6 mph  |
| MOWER DECK                                 |  |                   |   |
| Cutting Width                              | 54"  | 60"               | 60"   72"   |
| Deck Shell Construction                    | Floating, fabricated 7 ga (0.187") steel   |                   | Floating, fabricated 7 ga (0.187") steel  |
| Reinforcements (top/bottom — leading edge) | 7 ga / 7 ga – 1/4"   |                   | 7 ga / 7 ga – 1/4"  |
| Side Reinforcement                         | 5/16" steel  |                   | 5/16" steel   |
| Wear Guard                                 | 3/4" trim-side (polymer)   |                   | 3/4" trim-side (polymer)  |
| Blades / Blade-Tip Speed                   | 3 high-lift Marbain blades / 18,500 fpm (approx.)  |                   | 3 high-lift Marbain blades / 18,500 fpm (approx.)   |
| Spindle Construction                       | 8" sealed cast-aluminum housing (maintenance-free)   |                   | 8" sealed cast-aluminum housing (maintenance-free)  |
| Discharge Chute                            | High-density rubber  |                   | High-density rubber   |
| Deck Lift System                           | Foot pedal with spring assist  |                   | Foot pedal with spring assist   |
| Height Positions / Height Range            | 16 / 1" – 5"   |                   | 16 / 1" – 5"  |
| CHASSIS                                    |  |                   |   |
| ROPS                                       | 2" x 2" quick-latch toolless foldable 3-position   |                   | 2" x 2" quick-latch toolless foldable 3-position  |
| Rear Bumper                                | 5/16"-thick steel, standard rear hitch (e-coated)  |                   | 5/16"-thick steel, standard rear hitch (e-coated)   |
| Additional Bumper Features                 | Pre-drilled mounts for attachments   |                   | Pre-drilled mounts for attachments  |
| Frame                                      | Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)                               |                   | Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)  |
| Additional Frame Features                  | Integrated tie-down slots  |                   | Integrated tie-down slots   |
| Safety Lighting                            | —  |                   | —   |
| Front Axle                                 | 2" x 3" solid steel with sealed ball bearing   |                   | 2" x 3" solid steel with sealed ball bearings and isolation-dampening system  |
| Front Yoke                                 | 1/2"-thick steel with sealed ball bearings   |                   | 1/2"-thick steel with sealed ball bearings  |
| OPERATION                                  |  |                   |   |
| PTO  | Warner PTO clutch (125 ft-lb)  |                   | Warner PTO clutch (200 ft-lb) with Soft-Start   Warner PTO clutch (225 ft-lb) with Soft-Start   |
| Steering Control (L/S models)              | Lap bar / adjustable tilting steering wheel with electronic power steering (EPS)             |                   | Lap bar / adjustable tilting steering wheel with EPS  |
| Operator Controls                          | Low-profile throttle lever with dash guard   |                   | Low-profile throttle lever with dash guard  |
| Additional Controls                        | Sealed key switch / fingertip engagement PTO / resettable maintenance meter                  |                   | Sealed key switch / fingertip engagement PTO / resettable maintenance meter   |
| Parking Brake (L/S models)                 | Hand operated with hydro-pump release  |                   | Hand operated with hydro-pump release   |
| Front Tires (L/S models)                   | Smooth 13" x 6.5" – 6" / turf 15" x 6" – 6"  |                   | Smooth (run flat) 13" x 6.5" – 6" / turf 16" x 6.5" – 8"  |
| Rear Tires (L/S models)                    | Turf 24" x 12" – 12"   |                   | Turf 24" x 12" – 12"  |
| Seat Type                                  | High-back dial suspension with EVC cushion, seat belt, angle-back adjust and armrests        |                   | High-back dial suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension) |
| Seat Control Swivel                        | —  |                   | —   |
| DIMENSIONS                                 |  |                   |   |
| Length                                     | 84"  |                   | 86"   |
| Width (chute up / down)                    | 56" / 67"  | 62" / 73"         | 62" / 73"   74" / 85"   |
| Height (ROPS down / up)                    | 50" / 74"  |                   | 52" / 74"   |
| Weight                                     | 1,300 / 1,438 lbs  | 1,324 / 1,462 lbs | 1,424 / 1,562 lbs   1,475 / 1,613 lbs   |
| WARRANTY                                   |  |                   |   |
| Warranty Information*                      | 3-year limited, no-hour-limit warranty*<br>5-year limited, 1,750-hour limited deck warranty* |                   | 3-year limited, no-hour-limit warranty*   5-year limited, 1,750-hour limited deck warranty*   |
| TECH PACKAGE                               |  |                   |   |
| Joystick Control Handle                    | —  |                   | —   |
| GPS / Tower Antenna                        | —  |                   | —   |
| Overlap Cutting / Tracking                 | —  |                   | —   |



# PRO Z 900

| Z 960 L/S KW  |  | Z 960 L EFI   |  | Z 972 L EFI                                   |  | Z 972 L/S KW  |  | Z 972 SD   |  | Z 972 SDL                                     |  | Z 972 SDL EFI   |  | Z 960 S SP                    |  | Z 972 S SP |  |
|---|--|---|--|---|--|---|--|--|--|---|--|---|--|-------------------------------|--|------------|--|
| Kawasaki FX1000V<br>35 hp**   |  | Kawasaki FX1000V-EFI<br>38.5 hp**                                     |  | Kawasaki FX1000V<br>35 hp**                   |  | Kawasaki FX1000V<br>35 hp**   |  | Kawasaki FX1000V<br>35 hp**  |  | Kawasaki FX1000V-EFI<br>38.5 hp**             |  | Kawasaki FX Series 1000V<br>35 hp**   |  |                               |  |            |  |
|   |  |   |  |   |  | 999cc   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 14.9 gal (twin 7.45 gal tanks) with electric gauge  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  | 16cc Parker HTG pump with hydro release lever<br>Up to 14 mph / 7 mph |  |   |  |   |  | Dual 16cc Parker HTG pump with hydro release lever<br>Up to 12 mph / 6 mph   |  |   |  |   |  | Up to 14 mph / 6 mph          |  |            |  |
| 60"   |  |   |  | 72"   |  |   |  |  |  |   |  | 60"   |  |                               |  | 72"        |  |
|   |  |   |  |   |  | Floating, fabricated 7 ga (0.187") steel  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 7 ga / 7 ga – 1/4"  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 5/16" steel   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 3/4" trim-side (polymer)  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 3 high-lift Marbain blades / 18,500 fpm (approx.)   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 8" sealed cast-aluminum housing (maintenance-free)  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | High-density rubber   |  |  |  |   |  |   |  |                               |  |            |  |
| Foot pedal with spring assist   |  |   |  |   |  |   |  | Electronic power deck lift system (included)   |  |   |  |   |  | Foot pedal with spring assist |  |            |  |
|   |  |   |  |   |  | 16 / 1" – 5"  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  |   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 2" x 2" quick-latch toolless foldable 3-position  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 5/16"-thick steel, standard rear hitch (e-coated)   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | Pre-drilled mounts for attachments  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | Fully welded, 3/8" x 5" laser-cut steel full-length (e-coated)  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | Integrated tie-down slots   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | —   |  | 6 LED Lights for 360 degrees of lighted visibility;<br>amber beacon with three position adjustments                      |  |   |  |   |  | —                             |  |            |  |
|   |  |   |  |   |  | 2" x 3" solid steel with sealed ball bearings and isolation-dampening system  |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 1/2"-thick steel with sealed ball bearings  |  |  |  |   |  |   |  |                               |  |            |  |
| Warner PTO clutch (200 ft-lb) with Soft-Start                               |  |   |  | Warner PTO clutch (225 ft-lb) with Soft-Start |  |   |  |  |  | Warner PTO clutch (200 ft-lb) with Soft-Start |  | Warner PTO clutch (225 ft-lb) with Soft-Start   |  |                               |  |            |  |
| Lap bar / adjustable tilting steering wheel with EPS                        |  |   |  |   |  |   |  | Adjustable tilting steering wheel with EPS   |  |   |  | High performance, adjustable tilting steering wheel with EPS and foot-pedal speed control |  |                               |  |            |  |
|   |  |   |  |   |  | Low-profile throttle lever with dash guard  |  |  |  |   |  |   |  |                               |  |            |  |
| Sealed key switch / fingertip engagement PTO / resettable maintenance meter |  |   |  |   |  |   |  | Sealed key switch / fingertip engagement PTO / resettable maintenance meter / 12-volt outlet kit                         |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | Hand operated with hydro-pump release   |  |  |  |   |  |   |  |                               |  |            |  |
| Smooth (run flat) 15" x 6" – 6" / turf 16" x 6.5" – 8"                      |  |   |  |   |  |   |  | Turf 16" x 6.5" – 8" with weighted rim   |  |   |  |   |  |                               |  |            |  |
| Turf 26" x 12" – 12"  |  |   |  |   |  |   |  | Dual Terra Trac tread 25" x 9" – 12" (18" trac width)  |  |   |  |   |  | Turf 26" x 12" – 12"          |  |            |  |
|   |  |   |  |   |  | High-back air-ride suspension, EVC cushion, seat belt, angle-back adjust, lumbar support, padded armrests, isolation-dampening system mounted base (lateral suspension) |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | —   |  | User-controlled lock / unlock swivel seat for operator leveling up to 30-degrees total / 15-degrees left or right travel |  |   |  |   |  | —                             |  |            |  |
|   |  |   |  |   |  |   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 88"   |  |  |  |   |  |   |  |                               |  |            |  |
| 62" / 73"   |  |   |  | 74" / 85"                                     |  |   |  |  |  |   |  | 62" / 73"   |  |                               |  | 74" / 85"  |  |
| 48" / 75"   |  |   |  | 52" / 75"                                     |  |   |  | 49" / 75"  |  |   |  | 48" / 75"   |  |                               |  | 52" / 75"  |  |
| 1,442 / 1,580 lbs   |  | 1,447 lbs   |  | 1,596 lbs                                     |  | 1,591 lbs / 1,631 lbs   |  | 1,850 lbs  |  | 1,885 lbs                                     |  | 1,890 lbs   |  | 1,610 lbs                     |  | 1,690 lbs  |  |
|   |  |   |  |   |  |   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | 3-year limited, no-hour-limit warranty*   5-year limited, 1,750-hour limited deck warranty*   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  |   |  |  |  |   |  |   |  |                               |  |            |  |
|   |  |   |  |   |  | —   |  |  |  |   |  | Engagement indicator lights for cut line setting, RH/LH auto turning                      |  |                               |  |            |  |
|   |  |   |  |   |  | —   |  |  |  |   |  | LED lights show Auto Steer engagement   |  |                               |  |            |  |
|   |  |   |  |   |  | —   |  |  |  |   |  | Dash-mounted adjustable knob for deck cutting overlap                                     |  |                               |  |            |  |

PRO X™ SERIES

PRO X™ 600

|  | X 636   | X 648  | X 654  | X 654 EFI                                    | X 660  | X 660 EFI                                    |
|--|---|--|--|--|--|--|
| ENGINE AND DRIVE SYSTEM                    |   |  |  |  |  |  |
| Engine / Manufacturer                      | Kawasaki® FS600v  | Kawasaki FX691V  | Kawasaki FX801V  | Kawasaki FX850 EFI                           | Kawasaki FX801V  | Kawasaki FX850 EFI                           |
| Horsepower                                 | 18.5 hp**   | 22 hp**  | 25.5 hp**  | 29.5 hp**                                    | 25.5 hp**  | 29.5 hp**                                    |
| Displacement                               | 603cc   | 726cc  | 852cc  |  |  |  |
| Fuel Tank Capacity With Gauge              | 6 gal   | 8 gal  |  |  |  |  |
| Transmission                               | 12cc Hydro-Gear® pumps / 14.5 cu. in. Parker® wheel motors  |  |  |  |  |  |
| Ground Speed (forward/reverse)             | Up to 8.5 mph / 3.5 mph                                     | Up to 10 mph / 5 mph   |  |  |  |  |
| MOWER DECK                                 |   |  |  |  |  |  |
| Cutting Width                              | 36"   | 48"  | 54"  |  | 60"  |  |
| Blades                                     | 2 high-lift 18.5" Marbain® blades with 1.5" blade overlap   | 3 high-lift 17" Marbain blades with 1.5" blade overlap   | 3 high-lift 19" Marbain blades with 1.5" blade overlap |  | 3 high-lift 21" Marbain blades with 1.5" blade overlap |  |
| Deck Construction                          | 10 ga shell with 7 ga top and bottom reinforcement          |  |  |  |  |  |
| Reinforcements (top/bottom — leading edge) | —   |  |  |  |  |  |
| Side Reinforcement                         | —   |  |  |  |  |  |
| Wear Guard                                 | —   |  |  |  |  |  |
| Spindle Design                             | 5" sealed cast aluminum housing (maintenance-free)          | HD 8" aluminum housing, 35mm double-row sealed ball bearings, 1-3/8" through-shaft and maintenance-free design |  |  |  |  |
| Discharge Chute                            | High-density rubber   |  |  |  |  |  |
| Deck Lift System                           |   |  |  |  |  |  |
| Deck Height Adjust                         | Hand lever adjusting spring assist, pin selector for height |  |  |  |  |  |
| Height Positions / Height Range            | —   |  |  |  |  |  |
| Cutting Height                             | 1.75" – 4"  | 1-1/2" – 5"  |  |  |  |  |
| Anti-Scalp Deck Gauge Wheels               | —   | 2 front deck gauge wheels  | 4 front deck gauge wheels                              |  |  |  |
| CHASSIS                                    |   |  |  |  |  |  |
| Frame                                      | 1.5" x 3" full-length tube frame                            | 2" x 3" full-length tube frame   |  |  |  |  |
| Drive Axles                                | 1-1/8"  |  |  |  |  |  |
| Front Axle                                 | 2" x 3" tube construction                                   |  |  |  |  |  |
| Front Caster / Yoke                        | 3/8" thick steel  |  |  |  |  |  |
| Rear Track Width                           | 33"   | 46"  | 50"  |  | 54"  |  |
| Additional Frame Features                  | —   |  |  |  |  |  |
| OPERATION                                  |   |  |  |  |  |  |
| PTO Clutch Engagement & Type               | Electronic with quick reset                                 |  |  |  |  |  |
| Steering Controls                          | —   |  |  |  |  |  |
| Operator Controls                          | —   |  |  |  |  |  |
| Additional Controls                        | —   |  |  |  |  |  |
| Starting                                   | Electric starter  |  |  |  |  |  |
| Battery Cover / Storage                    | —   | Toolless battery cover / oversized cup holder, storage compartment with cargo net                              |  |  |  |  |
| Suspension                                 | Toolless  | Hand lever adjust, 3-position spring suspension foot platform  |  |  |  |  |
| Instrumentation                            | Hour meter, fuel gauge, key switch, throttle, choke         |  |  | Hour meter, fuel gauge, key switch, throttle | Hour meter, fuel gauge, key switch, throttle, choke    | Hour meter, fuel gauge, key switch, throttle |
| Cushion Padding                            | 3-position operator cushion                                 | 3-position operator cushion with cargo pocket  |  |  |  |  |
| Parking Brake / Brake Type                 | Hand lever control / scrub brake                            | Hand lever control / external band   |  |  |  |  |
| Front Caster Tires                         | 11" x 4" – 5" smooth flat-free                              | 13" x 5" – 6" smooth flat-free   |  |  |  |  |
| Rear Drive Tires                           | 21" x 8.5" – 10"  | 24" x 9.5" – 12"   | 24" x 12" – 12"  |  |  |  |
| DIMENSIONS                                 |   |  |  |  |  |  |
| Length                                     | 62"   | 69"  |  |  |  |  |
| Width (chute down/up)                      | 50" / 38"   | 62" / 50"  | 68" / 56"  |  | 74" / 62"  |  |
| Height                                     | 47"   |  |  |  |  |  |
| Weight                                     | 850   | 1,015  | 1,080  |  | 1,115  |  |
| WARRANTY                                   |   |  |  |  |  |  |
| Warranty Unit*                             | 2-year limited, no-hour-limit*                              | 3-year limited, no-hour-limit warranty*  |  |  |  |  |
| Warranty (Engine)*                         | 2-year limited, no-hour-limit*                              | 3-year limited manufacturer's warranty*  |  |  |  |  |
| Warranty (Deck)*                           | 2-year limited, no-hour-limit*                              | 5-year limited, 1,750-hour limited manufacturer's warranty*  |  |  |  |  |



|  | HW 336  |                     | HW 348  | HW 354                           |
|--|---|---------------------|---|----------------------------------|
| ENGINE AND DRIVE SYSTEM                    |   |                     |   |                                  |
| Engine / Manufacturer                      | Kawasaki FS481v (recoil)  |                     | Kawasaki FS541v (electric start)              | Kawasaki FS600v (electric start) |
| Horsepower                                 | 14.5 hp**   |                     | 15 hp**                                       | 18.5 hp**                        |
| Displacement                               |   |                     | 603cc   |                                  |
| Fuel Tank Capacity With Gauge              |   |                     | 5 gal   |                                  |
| Transmission                               |   |                     | Hydro-Gear ZT 2800 charged (commercial grade) |                                  |
| Ground Speed (forward / reverse)           |   |                     | Up to 7 mph / 3 mph                           |                                  |
| MOWER DECK                                 |   |                     |   |                                  |
| Cutting Width                              | 36"   | 48"                 | 54"   |                                  |
| Blades                                     | 3 high-lift Marbain blades / 18,500 fpm (approx.)                     |                     |   |                                  |
| Deck Construction                          | Fixed floating, fabricated 10-ga (0.135") steel                       |                     |   |                                  |
| Reinforcements (top/bottom — leading edge) | 7 ga / 7 ga — 7 ga  |                     |   |                                  |
| Side Reinforcement                         | 1/4" steel  |                     |   |                                  |
| Wear Guard                                 | 3/4" trim-side (polymer)  |                     |   |                                  |
| Spindle Design                             | 5" sealed cast-aluminum housing (maintenance-free)                    |                     |   |                                  |
| Discharge Chute                            | High-density rubber   |                     |   |                                  |
| Deck Lift System                           | 4-pin manual with deck-mounted lift handles                           |                     |   |                                  |
| Deck Height Adjust                         | —   |                     |   |                                  |
| Height Positions / Height Range            | 7 / 1.5" – 4.5"   |                     |   |                                  |
| Cutting Height                             | —   |                     |   |                                  |
| Anti-Scalp Deck Gauge Wheels               | —   |                     |   |                                  |
| CHASSIS                                    |   |                     |   |                                  |
| Frame                                      | Operator tower with 7-ga construction                                 |                     |   |                                  |
| Drive Axles                                | —   |                     |   |                                  |
| Front Axle                                 | 1.5" x 3" fully welded tube   |                     |   |                                  |
| Front Caster / Yoke                        | 3/8"-thick steel with sealed ball bearings                            |                     |   |                                  |
| Rear Track Width                           | —   |                     |   |                                  |
| Additional Frame Features                  | Frame-mounted foot pedal front-end lift assist                        |                     |   |                                  |
| OPERATION                                  |   |                     |   |                                  |
| PTO Clutch Engagement & Type               | Warner® PTO clutch (125 ft-lb)  |                     |   |                                  |
| Steering Controls                          | Hand-lever steering control with ball-bearing linkage for smooth feel |                     |   |                                  |
| Operator Controls                          | Single-knob straight-line tracking adjustment                         |                     |   |                                  |
| Additional Controls                        | Single-level speed control (0–7 mph)                                  |                     |   |                                  |
| Starting                                   | —   |                     |   |                                  |
| Battery Cover / Storage                    | —   |                     |   |                                  |
| Suspension                                 | —   |                     |   |                                  |
| Instrumentation                            | —   |                     |   |                                  |
| Cushion Padding                            | —   |                     |   |                                  |
| Parking Brake / Brake Type                 | Hand-operated lever   |                     |   |                                  |
| Front Caster Tires                         | 11" x 4.5" smooth run flat  |                     |   |                                  |
| Rear Drive Tires                           | Turf 18" x 6.5" – 8"  | Turf 20" x 10" – 8" |   |                                  |
| DIMENSIONS                                 |   |                     |   |                                  |
| Length                                     | 77"   |                     |   |                                  |
| Width (chute down / up)                    | 49" / 38"   | 61" / 50"           | 67" / 56"                                     |                                  |
| Height                                     | 45"   | 46"                 |   |                                  |
| Weight                                     | 590 lbs   | 665 lbs             | 720 lbs                                       |                                  |
| WARRANTY                                   |   |                     |   |                                  |
| Warranty Unit*                             | 2-year limited, no-hour-limit warranty*                               |                     |   |                                  |
| Warranty (Engine)*                         | —   |                     |   |                                  |
| Warranty (Deck)*                           | —   |                     |   |                                  |

# YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

INDEPENDENT DEALER  
*Cub Cadet*®

Cub Cadet dealers know their equipment. And they know how to take care of it and their customers. You'll get exceptional financing, great offers and the expertise you can only find from professionals who sell and service Cub Cadet equipment every day.

Support as strong as our machines, seven days a week, visit [cubcadet.com](http://cubcadet.com) or call toll-free 1-877-428-2349.



[FACEBOOK.COM/CUBCADET](https://www.facebook.com/CUBCADET)



[CUBCADET\\_USA](https://twitter.com/CUBCADET_USA)



[CUBCADETPRO](https://www.instagram.com/CUBCADETPRO)

## PROUD SUPPORTING MEMBERS OF NALP AND EQUALIS



## EXCEPTIONAL FINANCING OFFERS†



\* 3-year limited unit warranty, unlimited hours. 5-year limited deck warranty up to 1,750 hours. 2-year limited unit warranty, unlimited hours. 2-year limited deck warranty, no-hour-limit. For full warranty details and exclusions, visit [www.cubcadet.com](http://www.cubcadet.com) or your local dealer.

\*\* As rated by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940. As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

KOHLER® is a registered trademark of KOHLER Co.  
Kawasaki® is a registered trademark of Kawasaki Motors Corp.

† Restrictions apply. See dealer for details.

Cub Cadet commercial products are intended for professional use. See owner's manual or your local Cub Cadet Independent Dealer for warranty details and information. Certain restrictions apply.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual and on the machine. Models subject to limited availability.

Images may not reflect dealer inventory and/or unit specifications. Specifications subject to change without notice.

© 2023 Cub Cadet | Printed in U.S.A. | 773-10377



*Cub Cadet.*

# CHARGE UP YOUR LAWN CARE.



LAWN & GARDEN TRACTORS

**ELECTRIC**  
LITHIUM ION







# TABLE OF CONTENTS

|                               |       |
|-------------------------------|-------|
| Electric Capabilities         | 4–5   |
| Electric Convenience          | 6–7   |
| Ultima Series™ ZT1™ 42E       | 8–9   |
| XT™ Enduro Series® XT1® LT42E | 10–11 |
| CC30E Rider                   | 12–13 |
| Attachments & Accessories     | 14    |
| Specifications                | 15    |

# BATTERY POWERED. EMPHASIS ON POWER.

Your lawn care depends on strong equipment, and our electric lineup won't let you down. Each piece is engineered with the same uncompromising commitment to design, comfort and performance we demand from every product.







## **CUTS GRASS LIKE GAS.**

Think electric equipment compromises power? Think again. Our lithium-ion-powered electric lineup delivers a quality cut that you would expect from any Cub Cadet®.



## **POWER UNTIL THE END.**

Unlike the lead-acid batteries in many riders, our lithium-ion battery pack is designed to help minimize power fade, while the efficient brushless motor helps provide optimal power throughout.



## **100% ELECTRIC. 0% COMPROMISE.**

Our electric lineup meets the same rigorous Cub Cadet standards for performance, power and durability you'll find in any Cub Cadet equipment.

# SIMPLIFY YOUR LAWN CARE ROUTINE.

The benefits of electric equipment compared to gas are far beyond mowing your lawn. More flexibility, less time servicing and no more trips to the gas station frees up time to enjoy the lawn you love.



## **SIGNIFICANTLY QUIETER THAN GAS.**

Cut at dawn or dusk.



## **POWER UNTIL THE END.**

Designed to minimize power fade with the efficient brushless motor that helps provide optimal power throughout.



**FLEXIBLE CHARGING SYSTEM.**

Charge from a standard 110V outlet without waiting overnight. In a pinch, charge to the exact power you need with minimal risk of power fade.

**NO GAS. NO OIL. LESS HASSLES.**

Less time getting ready to cut means more time enjoying your yard.

**ZERO-EMISSIONS DURING OPERATION.**

No exhaust, carbon monoxide or unburned hydrocarbons from the on-board power source while in use.

# THE ULTIMATE MOWING EXPERIENCE. NOW EVEN MORE ELECTRIFYING.

The Ultima Series™ ZT1™ 42E.

## *ULTIMA SERIES*

- ▶ Continuous 2- x 2-inch square tubular frame
- ▶ User-centric design includes a high-back seat, hand grips and rubber floor mat
- ▶ ECO Mode helps provide longer run times in light cutting conditions while low speed is designed to enhance maneuverability around tight obstacles

Product Warranty

**3 YEAR†**

LIMITED WARRANTY

Battery Warranty

**4 YEAR†**

LIMITED WARRANTY

### Cub Cadet® Electric Advantages



#### LITHIUM ION BATTERY

designed to minimize power fade.



#### FLEXIBLE CHARGING SYSTEM

gives you a quick charge from a standard 110V outlet without waiting overnight.



#### LESS MAINTENANCE THAN GAS

including no gas, no oil changes, no air filters, no spark plugs, no fuel storage, no pulleys or belts.



#### CUT QUIETER

than gas to help you cut at dusk or dawn.



† Limited warranty—normal wear parts 30 days. For full warranty details, visit [cubcadet.com](http://cubcadet.com) or see your local dealer.



**CUSTOMER RATING ★★★★★**

"Very quiet, nice cut. Bought the ZT1 42E about 6 weeks ago and it is a no compromise zero turn, I cut about an acre on 1/2 a charge. Love the system and the no fuss. Hop and go."

**Customer from Pennsylvania | *ULTIMA ZT1 42E***





# LEVEL UP TO LITHIUM ION.

The XT™ Enduro Series® XT1® LT42E.

**XT1** **ENDURO SERIES**

- ▶ Automatic transmission requires no shifting—just push the pedal and go
- ▶ Loaded with modern comforts like automotive-inspired steering, adjustable seating and cruise control
- ▶ Direct-drive 42-inch stamped deck powered by one brushless motor per blade designed to provide optimal airflow and efficiency, along with side-discharge, bagging and mulching capabilities to help deliver a consistent cut with every mow

Product Warranty

**3 YEAR†**

LIMITED WARRANTY

Battery Warranty

**4 YEAR†**

LIMITED WARRANTY

## Cub Cadet® Electric Advantages



### LITHIUM ION BATTERY

designed to minimize power fade.



### FLEXIBLE CHARGING SYSTEM

gives you a quick charge from a standard 110V outlet without waiting overnight.



### LESS MAINTENANCE THAN GAS

including no gas, no oil changes, no air filters, no spark plugs, no fuel storage, no pulleys or belts.



### CUT QUIETER

than gas to help you cut at dusk or dawn.



† Limited warranty—normal wear parts 30 days. For full warranty details, visit [cubcadet.com](http://cubcadet.com) or see your local dealer.



CUSTOMER RATING ★★★★★

"The silent ride is cool and the sound of the blades are awesome. It gives a nice even cut and has plenty of pick up. Lots of power to manage hills/slopes. The battery is strong, and for my 1/2 acre I can get 3 to 4 cuts before charging."

Customer from Kentucky | **XT™ ENDURO SERIES® XT1® LT42E**





# EASY TO USE. EVEN EASIER TO OWN.

The CC30E.

## CC30

- ▶ Its compact size gives you incredible maneuverability and control so you can mow through small areas like most backyard gateways
- ▶ Packed with user-friendly features like a high-back seat, soft-touch steering wheel, front bumper, LED lights and cruise control
- ▶ Direct-drive 30-inch stamped deck powered by one brushless motor designed to provide optimal airflow and efficiency, along with side-discharge, bagging and mulching capabilities to help deliver a consistent cut with every mow

Product Warranty

**3 YEAR†**

LIMITED WARRANTY

Battery Warranty

**4 YEAR†**

LIMITED WARRANTY

### Cub Cadet® Electric Advantages



#### LITHIUM ION BATTERY

designed to minimize power fade.



#### FLEXIBLE CHARGING SYSTEM

gives you a quick charge from a standard 110V outlet without waiting overnight.



#### LESS MAINTENANCE THAN GAS

including no gas, no oil changes, no air filters, no spark plugs, no fuel storage, no pulleys or belts.



#### CUT QUIETER

than gas to help you cut at dusk or dawn.



† Limited warranty—normal wear parts 30 days. For full warranty details, visit [cubcadet.com](http://cubcadet.com) or see your local dealer.



**CUSTOMER RATING ★★★★★**

"The cut is smooth and clean. No gas, no oil, no spark plugs, no mess. I just unplug and cut. 25 minutes later I'm done. It's so easy and fun to operate."

Customer from Georgia | **CC30E**



# POWER THROUGH YOUR TOUGH JOBS.

Our electric riders can support a line-up of attachments and accessories designed for a variety of jobs. Here are a few popular choices.



## Cub Cadet® Hauler

With four collapsible sides for large loads, side access for easy unloading and up to 10 cubic feet of cargo space, this hauler holds what you need while using minimal space.



## Bagger System

Twin bagger\* engineered for breakthrough bagging performance.



## Sun Shade

Mow in comfort with a spacious sun shade.



## Mulch Kit

This kit cuts grass into fine pieces that can be returned to your lawn to help keep it healthy.



## All-Season Plow

With the convenience of the FastAttach® Connection System, this 46-inch strong all-season plow is designed to move snow, dirt, gravel, mulch and more.



## Snow Cab

Built with a strong powder-coated steel frame, this spacious snow cab helps give you 360-degree visibility.



## GENUINE PARTS. GENUINE ADVANTAGE.

Cub Cadet Genuine Parts are the only parts designed and engineered to meet Cub Cadet original equipment standards.

\*Use of 942-04308A and 490-110-C108 star shaped center hole blades or 742P05177A-X and 490-110-C202 S-shape center hole blades with this bagger attachment will help improve performance but likely reduce runtime of a battery mower.



## RIDERS

### SELECTION GUIDE

|                            | Ultima Series™ ZT1™ 42E  | XT™ Enduro Series® XT1® LT42E   | CC30E   |
|----------------------------|--|---|---|
| <b>POWER</b>               |  |   |   |
| Power Source               | Lithium-ion battery  | Lithium-ion battery   | Lithium-ion battery   |
| Battery                    | 56V MAX* 3,000Wh-60Ah  | 56V MAX* 3,000Wh-60Ah   | 56V MAX* 1,500Wh-30Ah   |
| Charger                    | 110V fast charger  | 110V fast charger   | 110V fast charger   |
| <b>DRIVE SYSTEM</b>        |  |   |   |
| Transmission               | Electric drive   | Foot-controlled electric drive  | Foot-controlled electric drive  |
| Forward / Reverse Speeds   | Up to 7 mph / 3.5 mph  | Up to 5.5 mph / 3 mph   | Up to 4 mph / 2 mph   |
| <b>CONTROLS</b>            |  |   |   |
| Steering Control           | Lap bar  | Optimized steering system, sector and pinion  | Optimized steering system, sector and pinion                            |
| Mow in Reverse             | Standard   | RevTEK™ reverse mowing technology   | RevTEK reverse mowing technology  |
| Brakes                     | Foot-controlled parking brake  | Disc  | Disc  |
| Cruise Control             | —  | Soft-touch engagement   | Soft-touch engagement   |
| <b>CUTTING DECK</b>        |  |   |   |
| Deck Construction          | 13-gauge stamped deck  | 13-gauge stamped deck   | 14-gauge stamped deck   |
| Cutting Width / Blades     | 42" / twin blade   | 42" / twin blade  | 30" / single blade  |
| Deck Cutting Height        | 1" – 4.5"  | 1" – 4"   | 1" – 3.5"   |
| Anti-Scalping Wheels       | 2 front  | 2 front   | —   |
| Deck Blade Engagement      | Electronic fingertip engagement  | Electronic fingertip engagement   | Electronic fingertip engagement   |
| Deck Lift                  | Foot-operated / 15 positions / dial adjust   | Lever / 12 positions / spring-assisted  | Lever / 5 positions / spring-assisted                                   |
| Spindle Construction       | Brushless motors   | Brushless motors  | Brushless motor   |
| <b>CHASSIS</b>             |  |   |   |
| Frame                      | Square 2" x 2" tubular upper and lower frame structure   | Fully robotically welded frame  | 14-gauge welded steel   |
| Front Castor Mounts        | Rectangular 2" x 2.5" square frame / offset  | —   | —   |
| Front Axle                 | —  | Heavy-duty cast iron  | Steel   |
| Turning Radius             | 0"   | 16"   | 18"   |
| Front / Rear Tires         | 11" x 6" – 5" / 20" x 8" – 8"  | 15" x 6" / 20" x 8"   | 13" x 5" / 16" x 6.5"   |
| Front / Rear Tire Tread    | Smooth / Turf Master®  | Turf Saver® / Turf Saver  | Turf Saver / Turf Saver   |
| Front Bumper               | —  | Standard  | Standard  |
| Rear Tow Hitch             | Standard   | Standard  | Standard  |
| <b>COMFORT</b>             |  |   |   |
| Seat                       | 20" high-back adjustable seat with suspension system   | 15" Cub Comfort™ high-back seat / 10" seat slide  | 15" Cub Comfort high-back seat / knob adjust                            |
| Steering Comfort           | Overmolded soft-touch grips  | Soft-touch steering wheel   | Soft-touch steering wheel   |
| <b>ADDITIONAL FEATURES</b> |  |   |   |
| Additional Features        | Cup holder, dual LED headlights, multi-tool, removable floor pan, rubber floor mat, USB port     | Cup holder, dual LED headlights, USB port   | Cup holder, dual LED headlights, USB port                               |
| <b>WARRANTY†</b>           |  |   |   |
| Warranty                   | 3-year/no hour limit, limited product warranty / 4-year limited battery / limited lifetime frame | 3-year/no hour limit, limited product warranty / 4-year limited battery / 5-year chassis and front axle unlimited hours | 3-year/no hour limit, limited product warranty / 4-year limited battery |

\* Maximum initial battery voltage (measured without a workload) is 56 volts. Nominal voltage is 50.4 volts.

† Limited warranty—normal wear parts 30 days. For full warranty details, visit cubcadet.com or see your local dealer.

Turf Saver® and Turf Master® are registered trademarks of The Carlstar Group LLC.

INDEPENDENT DEALER

*Cub Cadet*

# YOUR AUTHORIZED CUB CADET® DEALER MAKES YOUR EXPERIENCE EVEN BETTER.

Cub Cadet dealers know their equipment. And they know how to take care of it and their customers. You'll get exceptional financing, great offers and the expertise you can only find from professionals who sell and service Cub Cadet equipment every day.

## SUPPORT AS STRONG AS OUR MACHINES

Dedicated personal owner support seven days a week.

Visit [cubcadet.com](https://cubcadet.com) or call toll-free 1-877-428-2349.



[facebook.com/cubcadet](https://facebook.com/cubcadet)



[@cubcadet\\_usa](https://twitter.com/cubcadet_usa)



[cubcadet\\_usa](https://www.instagram.com/cubcadet_usa)



EXCEPTIONAL  
FINANCING  
OFFERS\*

\*Restrictions apply. See dealer or [cubcadet.com/en\\_US/financing](https://cubcadet.com/en_US/financing) for details.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating the machine, read, understand and follow all instructions in the manual and on the machine. Specifications are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.





*Cub Cadet*®

# DESIGNED FOR THOSE WHO LOVE TO LAWN.

INTRODUCING THE ALL-NEW ULTIMA SERIES™ ZTXS™



**ASK YOUR DEALER ABOUT EXCEPTIONAL FINANCING OFFERS<sup>†††</sup>**

<sup>†††</sup>Restrictions apply. See dealer or [cubcadet.com/en\\_US/financing](http://cubcadet.com/en_US/financing) for details.

# ULTIMA SERIES

# RESIDENTIAL ZERO-TURN MOWERS

## ULTIMA SERIES™ ZT™



- AeroForce™ fabricated decks excluding ZT1 42 and ZT1 42E
- Powerful Kohler® and Kawasaki® engines

- Continuous square tubular steel frame
- Up to 7.5 mph

**3 YEAR**  
**LIMITED WARRANTY**

Gas Models: 3-year/no hour limit, limited product warranty plus limited lifetime warranty on frame and fabricated deck shell\*\*  
ZT1 42E Electric Model: 3-year limited product warranty and 4-year limited battery warranty, plus limited lifetime warranty on frame\*\*

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>ZT1 42E ELECTRIC</b> | 56V MAX* Li-ion (60Ah)<br>3000 Watt Hours | 42" Stamped Deck                         | Electric Drive, Adjustable Seat, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 8" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan   |
| <b>ZT1 42</b>           | 22 HP† Twin Kohler KT7000                 | 42" Stamped Deck                         | Dual EZT-2200, Adjustable Seat, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 8" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan  |
| <b>ZT1 42 FAB</b>       | 18 HP† Kawasaki FR600V                    | 42" AeroForce Fabricated Deck            | Dual EZT-2200, Adjustable Seat, Front Tire: 11" x 6" - 5", Rear Tire 20" x 8" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan   |
| <b>ZT1 46</b>           | 22 HP† Twin Kohler KT7000                 | 46" AeroForce Fabricated Deck            | Dual EZT-2200, Adjustable Seat, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 8" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan  |
| <b>ZT1 50</b>           | 23 HP† Twin Kawasaki FR691V               | 50" AeroForce Fabricated Deck            | Dual EZT-2200, Adjustable Seat, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 10" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan   |
| <b>ZT1 54</b>           | 24 HP† Twin Kohler KT7000                 | 54" AeroForce Fabricated Deck            | Dual EZT-2200, Adjustable Seat, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 10" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan   |
| <b>ZT1 54P</b>          | 23 HP† Twin Kawasaki FR691V               | 54" AeroForce Fabricated Deck            | Dual EZT-2200, Adjustable Seat, Front Caster Suspension, Steel Fenders, Front tire: 11" x 6" - 5", Rear tire 20" x 12" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan          |
| <b>ZT2 50</b>           | 23 HP† Twin Kawasaki FR691V               | 50" AeroForce Reinforced Fabricated Deck | Dual TZ-350, Adjustable Seat w/Armrests, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan, Hour Meter                        |
| <b>ZT2 54</b>           | 23 HP† Twin Kawasaki FR691V               | 54" AeroForce Reinforced Fabricated Deck | Dual TZ-350, Adjustable Seat w/Armrests, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan, Hour Meter                        |
| <b>ZT2 60</b>           | 24 HP† Twin Kawasaki FR730V               | 60" AeroForce Reinforced Fabricated Deck | Dual TZ-350, Adjustable Seat w/Armrests, Front Tire: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan, Hour Meter                         |
| <b>ZT3 60</b>           | 24 HP† Twin Kawasaki FS730V               | 60" AeroForce Reinforced Fabricated Deck | Dual ZT-450, Adjustable Seat w/Armrests, Front Tires: 11" x 6" - 5", Rear Tires: 20" x 12" - 8", LED Headlight, Floor Mat, Comfort Grips, Removable Floor Pan, Front Caster Suspension, Hour Meter |

## ULTIMA SERIES™ ZTS™



**3 YEAR**  
**LIMITED WARRANTY**

3-year/no hour limit, limited product warranty and limited lifetime warranty on frame and fabricated deck shell\*\*

|                |                               |  |  |
|----------------|-------------------------------|--|--|
| <b>ZTS1 42</b> | 22 HP† Kohler KT7000          | 42" AeroForce Fabricated Deck            | Dual EZT-2200, Tilt Steering, LED Headlight, Floor Mats, Front Tire: 13" x 6.5" - 6", Rear Tire 20" x 8" - 8", Adjustable Seat, Soft-touch Steering Wheel                            |
| <b>ZTS1 46</b> | 22 HP† Kohler KT7000          | 46" AeroForce Fabricated Deck            | Dual EZT-2200, Tilt Steering, LED Headlight, Floor Mats, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 8" - 8", Adjustable Seat, Soft-touch Steering Wheel                         |
| <b>ZTS1 50</b> | 23 HP† Kohler KT7000          | 50" AeroForce Fabricated Deck            | Dual ZT-2200, Tilt Steering, LED Headlight, Floor Mats, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 10" - 8", Adjustable Seat, Soft-touch Steering Wheel                         |
| <b>ZTS2 50</b> | 23 HP† V-Twin Kohler 7000 PRO | 50" AeroForce Reinforced Fabricated Deck | Dual ZT-2800, Tilt Steering, LED Headlight, Floor Mats, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", Adjustable Seat w/ Armrests, Soft-touch Steering Wheel, Hour Meter |
| <b>ZTS2 54</b> | 24 HP† V-Twin Kohler 7000 PRO | 54" AeroForce Reinforced Fabricated Deck | Dual ZT-2800, Tilt Steering, LED Headlight, Floor Mats, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", Adjustable Seat w/ Armrests, Soft-touch Steering Wheel, Hour Meter |
| <b>ZTS2 60</b> | 25 HP† V-Twin Kohler 7000 PRO | 60" AeroForce Reinforced Fabricated Deck | Dual ZT-2800, Tilt Steering, LED Headlight, Floor Mats, Front Tires: 13" x 6.5" - 6", Rear Tires: 20" x 12" - 8", Adjustable Seat w/ Armrests, Soft-touch Steering Wheel, Hour Meter |

## XT™ ENDURO SERIES

## LAWN AND GARDEN TRACTORS

### XT1® ENDURO SERIES®



- Powerful engines
- Stamped and AeroForce™ fabricated decks

- Adjustable high-back seat

**3 YEAR**  
**LIMITED WARRANTY**

3-year/no-hour limit, limited product warranty including powertrain and 5-year/no-hour limit, limited product warranty on chassis and front axle/limited lifetime fabricated deck shell.\*\*

XT1™ LT42E Electric Model: 3-year limited product and 4-year limited battery and 5-year/no-hour limit, limited warranty on chassis and front axle\*\*

|                       |  |                               |  |
|-----------------------|--|-------------------------------|--|
| <b>LT42E ELECTRIC</b> | 56V MAX* Li-ion (60 Ah)<br>3000 Watt Hours | 42" Stamped Deck              | Foot-Controlled Electric Drive, Electric PTO               |
| <b>LT42B</b>          | 19 HP† Single Briggs & Stratton            | 42" Stamped Deck              | Hydro, Foot-Operated (Tuff Torq® TL-200), Manual PTO       |
| <b>LT46</b>           | 23 HP† Twin Kohler 7000                    | 46" Stamped Deck              | Hydro, Foot-Operated (Tuff Torq TL-200), Manual PTO        |
| <b>LT50</b>           | 24 HP† Twin Kohler 7000                    | 50" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Electric PTO         |
| <b>ST54</b>           | 24 HP† Twin Kohler 7000                    | 54" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Electric PTO, Bumper |
| <b>GT54</b>           | 25 HP† Twin Kohler 7000                    | 54" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K58), Electric PTO, Bumper |



# STEP UP TO A MOWING EXPERIENCE UNLIKE ANY OTHER.



## ULTIMA SERIES™ ZTX™

- 10-gauge steel fabricated AeroForce Max™ 48", 54" and 60" decks
- Commercial-grade Kohler and Kawasaki engines

- 1.5" x 3" tubular frame w/ offset front axle
- Up to 9 mph

**4 YEAR**  
LIMITED WARRANTY

4-year / 800-hour limited product warranty  
plus limited lifetime warranty on frame and fabricated deck shell\*\*

|                |                               |                                   |  |
|----------------|-------------------------------|-----------------------------------|--|
| <b>ZTX4 48</b> | 23 HP† Twin Kohler Pro 7000   | 48" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 22" x 12" - 12" Turf Master® |
| <b>ZTX4 54</b> | 24 HP† Twin Kohler Pro 7000   | 54" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 22" x 12" - 12" Turf Master  |
| <b>ZTX4 60</b> | 24 HP† Twin Kohler Pro 7000   | 60" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 22" x 12" - 12" Turf Master  |
| <b>ZTX5 48</b> | 23 HP† Kohler Confidant ZT730 | 48" AeroForce Max Fabricated Deck | Dual ZT-3200, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 23" x 12" - 12" Turf Master  |
| <b>ZTX5 54</b> | 25 HP† Kohler Confidant ZT740 | 54" AeroForce Max Fabricated Deck | Dual ZT-3200, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 23" x 12" - 12" Turf Master  |
| <b>ZTX5 60</b> | 25 HP† Kohler Confidant ZT740 | 60" AeroForce Max Fabricated Deck | Dual ZT-3200, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 23" x 12" - 12" Turf Master  |
| <b>ZTX6 54</b> | 25.5 HP† Twin Kawasaki FX801  | 54" AeroForce Max Fabricated Deck | Dual ZT-3400, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 24" x 12" - 12" Turf Master  |
| <b>ZTX6 60</b> | 25.5 HP† Twin Kawasaki FX801  | 60" AeroForce Max Fabricated Deck | Dual ZT-3400, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Smooth, Rear Tires: 24" x 12" - 12" Turf Master  |



**NEW**

## INTRODUCING THE ALL-NEW ULTIMA SERIES™ ZTXS™

- Cub Cadet's innovative and proprietary Synchro-Steer™ technology
- 10-gauge steel fabricated AeroForce Max 48", 54" and 60" decks

- Commercial-grade Kohler and Kawasaki engines
- 1.5" x 3" tubular frame w/ offset front axle
- Soft-touch steering wheel with tilt steering

**4 YEAR**  
LIMITED WARRANTY

4-year / 800-hour limited product warranty  
plus limited lifetime warranty on the frame and fabricated deck shell\*\*

|                 |                                    |                                   |   |
|-----------------|------------------------------------|-----------------------------------|---|
| <b>ZTXS4 48</b> | 23 HP† Twin Kohler Pro 7000        | 48" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master®, Rear Tires: 22" x 12" - 12" Turf Master |
| <b>ZTXS4 54</b> | 24 HP† Twin Kohler Pro 7000        | 54" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master, Rear Tires: 22" x 12" - 12" Turf Master  |
| <b>ZTXS4 60</b> | 24 HP† Twin Kohler Pro 7000        | 60" AeroForce Max Fabricated Deck | Dual ZT-3100, Electric PTO, Adjustable 20" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master, Rear Tires: 22" x 12" - 12" Turf Master  |
| <b>ZTXS5 54</b> | 25 HP† Twin Kohler Confidant ZT740 | 54" AeroForce Max Fabricated Deck | Dual ZT-3200, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master, Rear Tires: 23" x 12" - 12" Turf Master  |
| <b>ZTXS5 60</b> | 25 HP† Twin Kohler Confidant ZT740 | 60" AeroForce Max Fabricated Deck | Dual ZT-3200, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master, Rear Tires: 23" x 12" - 12" Turf Master  |
| <b>ZTXS6 60</b> | 25.5 HP† Twin Kawasaki FX801       | 60" AeroForce Max Fabricated Deck | Dual ZT-3400, Electric PTO, Adjustable 24" High-Back Seat w/ Armrests; Front Tires: 13" x 6.5" - 6" Turf Master, Rear Tires: 24" x 12" - 12" Turf Master  |

# EXPERIENCE STRENGTH BUILT INTO EVERY DETAIL.

## XT2® ENDURO SERIES® — DEALER EXCLUSIVE



- Powerful Kohler HD engines
- AeroForce fabricated decks
- Adjustable high-back seat w/ armrests

- Soft-touch steering wheel
- Front end protection comes standard

**3 YEAR**  
LIMITED WARRANTY

3-year/no-hour limit, limited product warranty including powertrain and 5-year/no-hour limit,  
limited product warranty on chassis and front axle/limited lifetime fabricated deck shell.\*\*



|               |                            |                               |  |
|---------------|----------------------------|-------------------------------|--|
| <b>LX42</b>   | 20 HP† Twin Kohler 7000 HD | 42" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Manual PTO, Bumper, Armrests   |
| <b>LX46</b>   | 23 HP† Twin Kohler 7000 HD | 46" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Electric PTO, Bumper, Armrests   |
| <b>SLX50</b>  | 24 HP† Twin Kohler 7000 HD | 50" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Electric PTO, FastAttach® Brush Guard, FastAttach Blade System, Armrests               |
| <b>SLX54</b>  | 24 HP† Twin Kohler 7000 HD | 54" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K46), Electric PTO, FastAttach Brush Guard, FastAttach Blade System, Armrests                |
| <b>GX50</b>   | 25 HP† Twin Kohler 7000 HD | 50" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K58), Electric PTO, FastAttach Brush Guard, FastAttach Blade System, Armrests                |
| <b>GX54 D</b> | 25 HP† Twin Kohler 7000 HD | 54" AeroForce Fabricated Deck | Hydro, Foot-Operated (Tuff Torq K62 with Diff-Lock), Electric PTO, FastAttach Brush Guard, FastAttach Blade System, Armrests |



## LITHIUM-ION ELECTRIC MOWERS

- **Less Maintenance Than Gas** — Including no gas, no oil changes, no air filters, no spark plugs, no fuel storage, no pulleys or belts.
- **Cuts Grass Like Gas** — Think electric equipment compromises power? Think again. Our lithium-ion-powered electric lineup delivers a quality cut that you would expect from any Cub Cadet®.
- **Lithium-Ion Battery** — Engineered for extended runtime and designed to minimize power fade.
- **Zero Emissions During Operation** — No exhaust, carbon monoxide or unburned hydrocarbons from the on-board power source while in use.
- **No Gas. No Oil. Less Hassles.** — Less time getting ready to cut means more time enjoying your yard.
- **Powerful Warranty** — 3-year limited product / 4-year limited battery warranty\*\*



CC30E



XT1® LT42E



Ultima ZT1™ 42E

|                         |                       |                  |
|-------------------------|-----------------------|------------------|
| <b>CC30E</b>            | 56V MAX* 1,500Wh-30Ah | 30" Stamped Deck |
| <b>XT1® LT42E</b>       | 56V MAX* 3,000Wh-60Ah | 42" Stamped Deck |
| <b>Ultima™ ZT1™ 42E</b> | 56V MAX* 3,000Wh-60Ah | 42" Stamped Deck |

## WALK-BEHIND MOWERS



SC 300B



SC 500K

|                |  |  |
|----------------|--|--|
| <b>SCP 100</b> | 140cc Briggs & Stratton                    | Push, 21" cutting width, 3-IN-1  |
| <b>SC 300B</b> | 163cc Briggs & Stratton                    | Front wheel drive, self-propelled, 21" cutting width, 3-IN-1, High Rear Wheels |
| <b>SC 300K</b> | 173cc Kohler® Commercial                   | Front wheel drive, self-propelled, 21" cutting width, 3-IN-1, High Rear Wheels |
| <b>SC 500K</b> | 173cc Kohler Commercial                    | Rear wheel drive, 21" cutting width, 3-IN-1, High Rear Wheels                  |
| <b>SC 900</b>  | 190cc Briggs & Stratton                    | Rear wheel drive, 23" cutting width, 3-IN-1, Cub Cadet® MySpeed®               |
| <b>CC 800</b>  | 344cc Briggs & Stratton OHV Electric Start | Rear wheel drive, 4-speed, 33" cutting width, 2-IN-1, Recoil Start Back Up     |

## COMPACT RIDER



### CC30 H 30" RIDER MOWER

- 10.5 HP\*\* Briggs & Stratton® Single OHV
- 30" Cutting Width
- LED High-Illumination Headlight
- Foot-Controlled Hydrostatic Transmission

## ADD MORE VERSATILITY WITH ATTACHMENTS.



### DOUBLE AND TRIPLE BAGGERS

#### XT™ ENDURO SERIES®

- XT1®/XT2® 42"/46" Twin
- XT1/XT2 42"/46" Triple
- XT1/XT2 50"/54" Triple

#### ULTIMA SERIES™

- Ultima ZT™ / ZTS™ 42/46" Twin
- Ultima ZT / ZTS 50/54" Twin
- Ultima ZT / ZTS 50/54/60" Triple
- Ultima ZTX™ / ZTXS™ 48" or 54"/60" Triple

### THE RIGHT ACCESSORY FOR YOUR NEEDS

- Cub Cadet Hauler
- All-Season Plow
- Mulch Kits
- Snow Cab
- Lawn Striper
- Snow Blades
- Leaf Collection System
- Sunshade

INDEPENDENT DEALER  
**Cub Cadet®**

**YOUR INDEPENDENT DEALER – EXPERT SERVICE. LOCALLY OWNED.**  
THE ADVICE, SELECTION AND SUPPORT YOU NEED TO FIND THE RIGHT FIT IS AT YOUR LOCAL CUB CADET DEALER.

\* Maximum initial battery voltage (measured without a workload) is 56 volts. Nominal voltage is 50.4 volts.

\*\* Limited warranty — certain restrictions apply. For full warranty details, visit cubcadet.com or see your local dealer.

† As rated by Kohler, all power levels are stated in gross horsepower at 3600 RPM per SAE J1940. As required by Kawasaki, horsepower tested in accordance with SAE J1995 and rated in accordance with SAE J2723 and certified by SAE International.

‡ Gross HP per SAE J1940 as rated by engine manufacturer at 3600 RPM.

Kohler® is a registered trademark of Kohler Co.  
Kawasaki® is a registered trademark of KAWASAKI JUKOGYO KABUSHIKI KAISHA.  
Tuff Torq® is a registered trademark of Kanzaki Kokyukoki Mfg. Co. Ltd.  
Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership.  
Turf Master® is a registered trademark of The Carlstar Group LLC.  
Briggs & Stratton® is a registered trademark of Briggs & Stratton, LLC.

Models subject to limited availability. Specifications are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.

© 2023 Cub Cadet 773-10380

**ASK ABOUT THE FULL  
LINE OF CUB CADET  
GENUINE PARTS**

AVAILABLE ONLY AT YOUR  
LOCAL INDEPENDENT DEALER.

